

CARLSTAR™

VOLUME 1



SPECIALTY TIRES AND WHEELS



www.carlstar.com



tires are becoming



Titan International Inc. offers a diverse portfolio of innovative, high-quality wheel, tire, and undercarriage products.

This Specialty Tire and Wheel Catalog features Carlisle® and Carlstar™ branded products for outdoor power equipment, powersports, high-speed trailers, agriculture, construction, and industrial segments. Use the color guide to select the right tire for your customers.



As a leading North American tire and wheel manufacturer with a global dealer network, Titan provides durable products and quality service. For more information on Carlisle and Carlstar products, visit www.carlstar.com or contact your Titan Specialty Representative.



OUTDOOR POWER EQUIPMENT ALL OUTDOOR POWER EQUIPMENT TIRES ARE NOT DOT RATED

TURF SAVER®	- Turf-friendly market leading design for residential mowing applications.	6
TURF SAVER® II	- Second generation Turf Saver with round shoulder design for residential applications.	7
TURF TRAC R/S	- Versatile turf tire with balanced profile for grounds care and other applications.	7
VERSA TRAC	- Multi-angle tread lug edges for superior traction on varying terrain, giving better control and grip.	8
REAPRO	- Experience top-tier traction due to increased lug angle.	8
TURF MASTER® PLUS	- Professional grade tire optimized for stability and traction.	8
TURF MASTER®	- Commercial grade performance optimizes stability and traction.	9
MULTI-TRAC C/S	- Commercial grade performance optimizes stability and traction.	10
TURF ARMOR®	- Updated, rugged styling with excellent traction.	11
VERSA TURF®	- Radial construction for improved flotation while maximizing traction.	11
ULTRA TRAC	- Ultra high flotation tires. Popular for large grounds maintenance equipment applications.	11
FAST TRAX®	- Unique low profile tire features aggressive tread and great traction.	12
TURF CTR	- Tread lightly with this low impact, round shouldered design.	12
SMOOTH	- Turf-friendly smooth profile for pro mowers and grounds maintenance equipment.	13
STRAIGHT RIB	- Another top turf care design. Great for ZTR, golf and other applications.	13
AT101 CHEVRON	- Special lug with bar design for ZTR drive tires and other applications.	14
WHEELBARROW	- Classic wheelbarrow rib for lawn carts, spreaders and wheelbarrows.	14
STUD	- Versatile stud tread suitable for a variety of rugged applications.	15
SAWTOOTH®	- Functional tread design popular for material handling equipment.	15
SUPER LUG/POWER TRAC/TRU POWER	- Aggressive traction used for tiller and garden tractor applications.	16
VPO/INVICTUS/TURF MASTER/SMOOTH	- Titan VPO Variable Pressure Operation Technology.	17
RELIANCE TIRES AND ASSEMBLIES	- Semi-pneumatic technology offers a flat-free, airless solution.	18
FLAT FREE	- Flat free assemblies for lawn and garden, wheelbarrows, hand trucks and lawn mowers.	19
TOUR MAX®	- Upscale choice for golf cars and closed-community vehicles.	20
LINKS®	- Premium level golf tire product with unmatched stability, durability and puncture resistance.	20
FAIRWAY PRO	- A workhorse value delivering maximum golf course service.	20
CLASSIC RB	- Classic RB is a high load capacity tire with a broad footprint for maximum turf protection.	20
TURF GLIDE	- One of the original golf car tires, the Turf Glide tire has a tall sidewall to absorb impact.	20
INDUSTRIAL TRAX	- Versatile tire designed for hard surface utility vehicle applications.	21
SNOW HOG	- Snow thrower design with added traction.	21
XTRAC®	- Aggressive tread for snow thrower and other push-behind applications.	22



POWERSPORTS ALL POWERSPORTS TIRES ARE NOT DOT RATED

AT489	- A Powersports Industry favorite. The 489 is light, strong and stable.	26
AT489 II	- Next generation of the 489 delivers dependable performance on a variety of terrains.	27
489 XD	- Built on a proven design, but upgraded for demanding applications.	27
TRAIL WOLF®	- Forward traction design with extended wear compound for recreational use.	28
DURA TRAIL®	- All-purpose tire with improved shoulder protection.	28
A-C-T	- Radial construction, All-Conditions-Tire. Deep self-cleaning open tread.	29
STRYKER®	- Chevron design all-purpose tire that is work ready and self-cleaning.	29
WORKMATE®	- Perfect balance of traction, stability and control for utility UTVs.	29
WORKMATE® H/S	- Perfect balance of traction, stability and control for utility UTVs.	30
PXT2	- Designed for heavy payload applications.	30
BLACK ROCK®	- Built strong and ready for any trail.	31
A-C-T HD	- Heavy duty All-Conditions-Tire with increased puncture resistance and load capabilities.	31
VERSA TRAIL® Series	- Versa Trail® ATR, Versa Trail® XTR, Versa Trail® XD.	32
ALL TRAIL®	- Excellent for utility on pavement, concrete and hard-packed soil applications.	33
ALL TRAIL® II	- An extension of the All Trail line. Workhorse applications.	33
HD FIELD TRAX	- All around get-it-done field, farm and general outdoor favorite.	34
KNOBBY	- Classic knobby tread design yielding both puncture resistance and traction.	34
TURF TAMER	- From competitive track to recreation, the Turf Tamer is a longtime favorite.	34



TRAILER

RADIAL TRAIL® HD	- Radial trailer tire offers increased tire life.	38
ULTRA SPORT RH	- Low profile design that provides a high performance look.	38
SPORT TRAIL®	- Bias construction with a radial look.	39
SPORT TRAIL® LH	- Perfect for boat, cargo, horse and stock, utility and specialty trailers.	39
CSL 16 ALL STEEL	- Heavy duty hauling capabilities for large equipment and extremely heavy loads.	40
USA TRAIL®	- Complete line of bias products for applications requiring durable performance.	40
SURE TRAIL	- Designed for marine applications.	40
EXTRA GRIP	- Perfect for extra grip.	40
LPT	- All Steel body specifically designed for heavy-duty trailers.	41
RADIAL TRAIL A/T	- Offers superior traction, improved rolling resistance, minimized wear and noise.	41



AGRICULTURE / CONSTRUCTION ALL AGRICULTURE / CONSTRUCTION TIRES ARE NOT DOT RATED

FARM SPECIALIST® F-2 TRIPLE RIB - Triple rib front for improved steering in loose soil.	44
FARM SPECIALIST® F-2M QUAD RIB - Quad rib front design. Flotation and variable soil steering.	44
FARM SPECIALIST® F-3 INDUSTRIAL FRONT - Rugged tread construction for front tractor steering applications.	44
FARM SPECIALIST® F-3 RADIAL IMPLEMENT - Radial construction with IF technology.	45
FARM SPECIALIST® F-1 HIGHWAY SERVICE IMPLEMENT - Designed for towed vehicle applications at intermittent highway speeds.	45
FSE F-1 IMPLEMENT - Designed for towed vehicle applications at intermittent highway speeds.	45
RADIAL I-1 IMPLEMENT - Designed to carry 20% higher loads at the same pressure as standard metric tires.	45
FARM SPECIALIST® HF-1 IMPLEMENT - Wide flotation implement tire for balers, wagons and harvest equipment..	46
FARM SPECIALIST® I-1 IMPLEMENT - Implement tire for wagons, tankers, seeders, balers and other flotation applications.	46
TRAC CHIEF® I-3 - Outstanding traction on implements and backhoes.	47
FARM SPECIALIST® TB - Primarily used on CUT tractors, designed for improved traction and self-cleaning.	47
FARM SPECIALIST® R-1 - Multi-angle long bar tread for general farming applications.	48
TURF PRO R-3 / TURF PRO PLUS R-3 - Flotation tread design for general turf and mowing applications.	48
MULTI-TRAC CS R-3 - For general turf and mowing applications for minimal ground disturbance.	48
GROUND FORCE R-3 - Features a high flotation and turf-friendly design, optimal for tractor applications where low ground pressure is required such as golf courses or sandy soil.	48
Versa Turf - Reduces turf disturbance while maximizing traction with its 60% deeper tread depth.	49
USA LOADER® - Aerial platform lifts, backhoes, and skid steer tractor applications.	49
GROUND FORCE 600/625 XT - Built for backhoe loaders in all weather conditions.	49
TRAC CHIEF® - Standard duty skid steer and tractor traction applications.	50
TRAC CHIEF® XT - use on skid steer, backhoe, compact tractor, aerial work platform lifts and three-wheel rough terrain forklifts in general purpose applications.	50
GROUND FORCE® 400 R-4 - Ideal for general-duty skid steer applications.	50
GROUND FORCE 400 ULTRA - Perfect for severe service skid steer applications.	51
GROUND FORCE 400 MX - Designed for severe duty, multi-surface skid steer applications.	51
ULTRA GUARD STEEL - Radial construction allows for greater load carrying capacity at lower inflation pressures.	51
FSTR - Large diameter tire designed specifically for Agriculture.	52 – 53



INDUSTRIAL ALL INDUSTRIAL TIRES ARE NOT DOT RATED

INDUSTRIAL DEEP TRACTION - Standard service application for forklifts.	56
ROAD ROLLER - Heat resistant design for paving equipment.	56
INDUSTRIAL ALL PURPOSE - Multi-purpose tire for industrial equipment.	56
PREMIUM WIDE TRAC - Forklift and material handling applications - premium levels.	57
GROUND FORCE® ULTRA RIB GSE - Deep tread design with premium compounding for ground support equipment.	57
GROUND FORCE® 300 G-2 - Motor grader tire designed for stability and good traction in all weather conditions.	58
GROUND FORCE® LFT - Low profile tire designed for boom lifts.	58
GROUND FORCE® 500 - Designed for lateral stability, these solid non-marking tire assemblies are ideal for electric or slab scissor lifts.	59



WHEELS

AG WHEELS - Steel.	62
TRAILER WHEELS - Steel and Aluminum Trailer Wheels - Boxed	63 – 64



TUBES AND FLAPS

TUBE FITMENTS & APPLICATIONS	65 – 71
TUBE VALVE STEMS	72

Turf and Lawn

RESIDENTIAL




TURF SAVER®

6




TURF SAVER® II

7

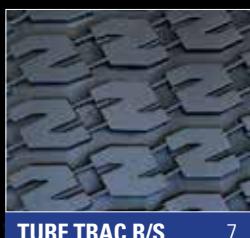

TURF TRAC R/S

7

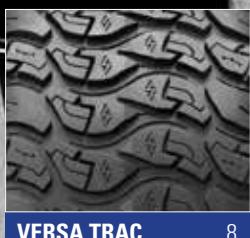

VERSATRAC

8



REAPRO

8

PROFESSIONAL



TURF MASTER® PLUS

8




TURF MASTER®

9



MULTI-TRAC C/S

10

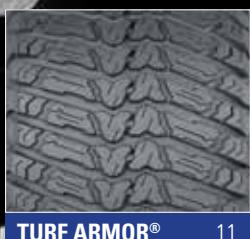

TURF ARMOR®

11



VERSATURF®

11



ULTRA TRAC

11



FAST TRAX®

12



TURF CTR

12



SMOOTH

13



STRAIGHT RIB

13



AT 101 CHEVRON

14

Chore



WHEELBARROW

14



STUD

15




SAWTOOTH®

15




SUPER LUG

16

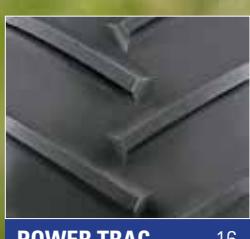

POWER TRAC

16

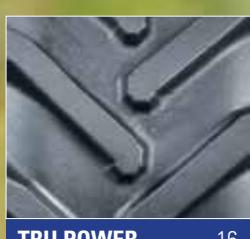

TRU POWER

16



Airless Tires



VPO INVICTUS 17




VPO TURF MASTER 17



VPO SMOOTH 17



RELIANCE SMOOTH 18




RELIANCE RIB 18



FLAT FREE 19

Golf / Utility



TOUR MAX® 20



LINKS® 20



FAIRWAY PRO 20



CLASSIC RB 20




TURF GLIDE 20



INDUSTRIAL TRAX 21

Snow



SNOW HOG 21



XTRAC® 22



TURF SAVER

CONSUMER, COMMERCIAL TURF EQUIPMENT, GOLF CARS AND UTILITY VEHICLES

TURF SAVER®

CARLISLE

With its classic square shouldered design, the Turf Saver tire is the market leader for residential riding lawn mowers worldwide. The flat profile and chevron tread provide excellent traction. Its turf-friendly design and breadth of line make it versatile in both application and fitment.

SIZE	PRODUCT CODE	PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 10 MPH	MAX PSI	TIRE WEIGHT
4.10-4	5110251	2	10.9	3.8	2.50	225	24	2.8
4.80-8	5112501	2	16.5	4.8	3.75	440	20	5.7
9x3.50-4	5110111	4	8.8	3.6	2.50	260	50	2.0
11x4.00-4	5110271	2	11.2	4.1	2.50	215	22	3.0
11x4.00-5	5110101	2	10.9	4.0	3.00	210	22	3.2
13x5.00-6	5110211	4	13.0	4.8	3.50	440*	40	4.3
13x5.00-6	5110201	2	12.8	4.7	3.50	290*	20	3.5
13x6.50-6	5111851	2	13.3	6.5	4.50	320	14	5.5
15x6.00-6	5110301	2	14.3	6.4	4.50	365	14	4.8
16x6.50-8	5110951	2	16.3	6.6	5.38	385	12	6.0
16x7.50-8	5112001	2	16.4	7.0	5.38	480*	12	7.5
18x6.50-8	5110981	2	17.2	6.4	5.38	520	14	6.6
18x7.50-8	5111021	4	18.0	7.2	5.38	805	24	9.6
18x8.50-8	5110701	2	17.9	8.2	7.00	520	10	9.0
18x9.50-8	5110841	2	17.8	9.5	7.00	695	12	10.6
18x9.50-8	6L05011	4	17.9	9.4	7.00	935	20	11.3
18x9.50-8	511082^	6	18.5	9.5	7.00	1295	36	11.5
20x8.00-8	5110801	2	19.2	9.0	7.00	600	10	10.3
20x8.00-10	5111111	4	20.0	7.9	6.00	910*	24	12.3
20x10.00-8	5111011	2	19.6	10.4	7.00	760	10	13.5
20x10.00-10	5111161	4	20.1	8.8	6.00	1230*	24	14.2
22x9.50-12	5110511	2	21.3	8.9	7.00	785	12	14.8
23x8.50-12	5110901	2	23.0	8.6	7.00	715*	10	13.9
23x9.50-12	5111001	2	23.2	9.4	7.00	910*	12	14.7
23x10.50-12	6L03381	2	22.8	10.4	8.50	880*	10	17.2
23x10.50-12	6L05031	4	22.9	10.3	8.50	1320	20	18.0

[^]Tires will remain Carlisle branded until further notice

* Max load @ 12.5 MPH



TURF SAVER II



TURF TRAC R/S

TURF SAVER® II

The Turf Saver II tire is a modified version of the Turf Saver. It features a round shoulder profile and is designed for use on residential riding lawn mowers. It is also commonly used for towable lawn carts, spreaders, sprayers and other mower attachments.

SIZE	PRODUCT CODE	PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 10 MPH	MAX PSI	TIRE WEIGHT
15x6.00-6	5112301	2	14.3	5.9	4.50	365	14	4.3
20x8.00-8	5112801	2	19.1	8.9	7.00	600	10	8.8

TURF TRAC R/S

The Turf Trac R/S tire offers all-around best performance in our residential product line. Applications include grounds care equipment, zero turn mowers and utility vehicles.

SIZE	PRODUCT CODE	PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 10 MPH	MAX PSI	TIRE WEIGHT
15x6.00-6	5753451	2	14.2	6.4	4.50	365	14	4.7
16x6.50-8	6L02651	4	16.0	6.7	5.38	615*	28	6.5
18x6.50-8	575324	8	17.6	6.6	5.38	1170	58	12.1
18x8.50-8	5753311	4	17.7	8.1	7.00	825*	22	9.9
20x10.00-8	5753411	4	19.7	9.7	7.00	1200	22	11.5
22.5x10.00-8	5753B71	4	22.6	10.5	7.00	1390	22	18.7
25x12.00-9	50D3T7	4	25.2	12.2	10.00	1820*	20	22.1
20x10.00-10	50D362	4	19.6	9.4	8.00	1170	22	12.5
20x12.00-10	5753151	4	19.8	10.1	7.00	1320*	20	15.8
22x9.50-10	5753N11	4	21.7	9.5	7.00	965*	14	15.3
24x9.50-10	5753P2	4	24.3	9.8	7.75	1430	22	18.3
24x12.00-10	5753A61	4	24.4	11.9	7.75	1710*	20	23.0
23x10.50-12	5753671	4	22.6	10.2	8.50	1320	20	14.1
24x12.00-12	575390	6	23.3	11.0	8.50	2270	32	21.2
26x12.00-12	50D363	10	25.3	12.4	10.50	3300	52	26.2

* Max load @ 12.5 MPH



VERSATRAC

REAPRO

TURFMASTER PLUS

VERSATRAC - NEW!

Our Ultra Cross powersports tire redesigned for lawn and garden use. Enjoy superior traction with multi-angle lug edges, maximum turf protection with a flat profile and large tread buttons, and enhanced ozone resistance for longevity. Self-cleaning mud breakers ensure consistent performance. Suitable for residential and professional zero-turn mowers and garden tractors.

SIZE	PRODUCT CODE	PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 10 MPH	MAX PSI	TIRE WEIGHT
18x9.50-8	6L20801	4	18.2	9.2	7.00	935	20	12.5
20x8.00-8	6L21441	2	20.0	8.4	7.00	600	10	11.5
20x10.00-8	6L21431	2	20.0	10.2	7.00	760	10	14.7
20x10.00-10	6L21971	4	20.0	9.6	7.00	1170	22	15.0
20x12.00-8	6L21421	2	19.9	11.3	8.50	910	10	16.2
22x11.00-10	6L20291	4	22.0	10.5	7.00	1480	22	17.6

REAPRO - NEW!

Experience top-tier traction due to increased lug angle, ensuring optimal mower performance in any condition. The deeper tread enhances grip and durability, while large tread buttons protect turf. Designed to resist ozone and wear, these tires have an extended lifespan and shed mud to stay clean.

SIZE	PRODUCT CODE	PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 10 MPH	MAX PSI	TIRE WEIGHT
22x10.00-10	6X22551	4	21.8	9.6	7.00	1360	22	17.0
22x11.00-10	6X21161	4	21.5	10.3	7.00	1480	22	17.0
23x10.50-12	6X21171	4	23.0	10.4	8.50	1320	20	18.5
24x12.00-12	6X21181	4	23.6	11.7	9.50	1710	20	22.5

TURFMASTER® PLUS



Turf Master Plus professional grade tire features our most durable compound with deep tread lugs in a profile optimized for stability and traction.

SIZE	PRODUCT CODE	PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 10 MPH	MAX PSI	TIRE WEIGHT
22x12.00-12	6L09811	4	23.0	11.5	9.50	1480	20	22.0
23x12.00-12	6L09821	4	23.9	11.5	9.50	1610	20	22.0
24x12.00-12	6L09831	4	24.9	11.7	9.50	1710	20	22.6

Tires in this product line will remain Carlisle branded until further notice



TURF MASTER

TURF MASTER®

Turf Master professional grade tires feature our most durable compound with deep tread lugs in a profile optimized for stability and traction.

SIZE	PRODUCT CODE	PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 10 MPH	MAX PSI	TIRE WEIGHT
13x6.50-6	5112491	4	13.4	6.1	4.50	480*	28	5.8
15x6.00-6	5112521	4	14.4	6.0	4.50	565*	30	6.0
15x6.50-8	5112531	2	15.0	6.2	5.38	385	14	6.2
16x6.50-8	5114011	4	16.5	6.3	5.38	615*	28	7.4
16x7.50-8	5114021	4	16.5	7.0	5.38	675*	24	8.5
18x6.50-8	5114171	4	17.4	6.4	5.38	760	28	7.7
18x7.50-8	6L09091	4	17.9	7.3	5.38	805	24	9.5
18x8.50-8	5114041	4	18.3	8.1	7.00	825*	22	10.3
18x9.50-8	5114131	4	18.1	9.2	7.00	1050	24	11.6
18x9.50-8	6L16641	6	18.1	9.2	7.00	1320*	36	11.9
20x8.00-8	6L09121	2	19.9	8.3	7.00	600	10	10.5
20x10.00-8	6L09371	2	19.9	10.1	7.00	760	10	13.9
20x10.00-8	5114051	4	19.9	10.3	7.00	1200*	22	14.7
20x12.00-8	6L15741	2	19.9	11.3	8.50	910	10	15.2
20x7.00-10	5114271	4	20.5	7.7	6.00	910	26	12.8
20x8.00-10	5114281	4	20.2	8.1	6.00	910*	24	14.2
20x10.00-10	5114161	4	20.0	8.8	6.00	1170*	22	13.9
20x10.00-10	6L07411	6	19.5	9.5	7.00	1430*	32	16.4
20x12.00-10	6L09161	2	19.8	11.0	8.50	910	10	15.9
20x12.00-10	511257	4	20.1	10.3	8.00	1320	20	14.1
22x10.00-10	511256	4	21.8	9.9	7.00	1360	22	15.8
22x11.00-10	5112551	4	21.7	10.1	7.00	1480	22	15.5
22x9.50-12	5114331	4	22.0	9.2	7.00	1305	24	16.3
22x10.50-12	5114261	4	22.5	10.1	8.50	1295	20	17.5
23x8.50-12	5114191	4	23.0	8.6	7.00	1100*	22	14.2
23x9.50-12	6L08381	4	23.0	9.2	7.00	1230*	20	17.0
23x10.50-12	5114081	4	23.3	10.0	8.50	1390	20	17.5
23x10.50-12	6L16631	6	23.0	10.0	8.50	1760*	32	19.0
24x9.50-12	6L08371	4	23.6	9.5	7.00	1480*	24	17.7
24x12.00-12	5114091	4	23.6	11.4	8.50	1710	20	22.6

* Max load @ 12.5 MPH



MULTI-TRAC C/S



MULTI-TRAC C/S

Multi-Trac C/S professional grade tires feature our most durable compound with deep tread lugs in a profile optimized for stability and traction.

SIZE	PRODUCT CODE	PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 12.5 MPH	MAX PSI	TIRE WEIGHT
18x8.50-8	574365	8	17.6	8.3	7.00	1280	44	14.3
18x9.50-8	574399^	6	18.2	8.6	7.00	1295	36	12.9
20x8.00-8	6L03221	2	19.2	9.0	7.00	600*	10	10.4
18x8.50-10	5743U11	4	18.0	8.1	7.00	825	22	11.2
18x8.50-10	6L0174	6	18.2	8.1	7.00	1050*	32	12.3
24x12.00-12	574352^	4	23.4	10.9	8.50	1710*	20	22.8
18x10.50-10	5743E51	4	17.9	10.2	8.50	990*	20	14.2
24x9.50-12	574338^	4	24.0	9.5	7.00	1430	22	17.1
23x8.50-12	574372^	6	22.4	8.3	7.00	1430*	34	18.4
23x10.50-12	574353^	6	22.5	10.2	8.50	1760*	32	22.6
25x9.00-12	574368	4	24.9	9.5	8.00	1520	24	17.5
25x11.00-12	574369	4	25.2	10.8	8.00	1820	24	22.0
26x9.50-12	6L04091	4	25.5	9.3	7.00	1520*	20	20.8
26x12.00-12	5743611	4	25.4	11.4	8.50	1760*	20	25.5
26x12.00-12	5743771	6	25.6	11.5	8.50	2270	30	26.6
24x8.50-14	574324	4	23.8	8.4	7.00	1230	22	17.7
25x8.50-14	574339	4	25.0	8.6	7.00	1320	22	20.8
26x14.00-12	5743W7	4	25.5	14.0	10.50	2120*	18	32.4
25x8.50-14	574371	6	24.9	8.6	7.00	1650*	32	23.9
27x8.50-15	574348	4	26.6	8.5	7.00	1230**	30	26.2
27x8.50-15	574356^	6	26.6	8.6	7.00	1570**	45	25.9
27x10.50-15	5743H6	4	27.5	10.2	8.00	1320**	30	30.1
27x10.50-15	560371	8	27.3	11.2	8.50	1870**	60	32.1
29x12.50-15	560454	6	29.2	12.2	10.00	1710**	30	36.0
29x12.50-15	560478	10	29.0	12.5	10.00	2470**	60	39.7
31x13.50-15	560362	4	31.5	13.5	10.00	2150	20	46.1

[^]Tires will remain Carlisle branded until further notice

* Max load @ 10 MPH

** Max load @ 30 MPH



TURF ARMOR

VERSA TURF

ULTRA TRAC

TURF ARMOR®

The Turf Armor's updated, rugged styling features a unique multi-angled tread pattern. The Turf Armor tread pattern is designed to fully connect with the ground resulting in evenly distributed ground pressure for excellent traction.

SIZE	PRODUCT CODE	PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 10 MPH	MAX PSI	TIRE WEIGHT
20x8.00-8	6L17931	4	20.0	8.4	7.00	965	22	11.8
20x10.00-8	6L17941	4	20.1	10.3	7.00	1200	22	15.5
20x7.00-10	6L19651	4	20.0	7.4	6.00	910*	26	11.9
20x10.00-10	6L19641	4	20.0	9.6	7.00	1170*	22	14.9
22x11.00-10	6L19631	4	22.0	10.5	7.00	1480*	22	17.4
23x10.50-12	6L19601	4	23.0	10.4	8.50	1320	20	18.4
24x9.50-12	6L19591	4	23.9	9.6	7.00	1480	24	18.0
24x12.00-12	6L17951	4	23.8	11.7	9.50	1710	20	22.0
26x12.00-12	6L19581	4	25.9	11.3	8.50	1760	20	26.5

* Max load @ 12.5 MPH

VERSA TURF®



Designed with a radial construction for improved flotation, the Versa Turf reduces turf disturbance while maximizing traction with its 60% deeper tread depth compared to a standard R-3 tire design. Engineered with superior mud-shedding performance by featuring self-cleaning breaker bars in the tread and rounded shoulders. The radial construction and tread design make this the tire to have in snow and ice.

SIZE	PRODUCT CODE	PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 12.5 MPH	MAX PSI	TIRE WEIGHT
18x8.50R10	6L09621^	4	18.7	7.4	6.00	825	22	12.5
23x8.50R12	6L13551^	6	22.6	8.4	7.00	1820*	50	20.6
24x12.00R12	6L13941^	4	23.9	11.5	9.50	1710	20	26.6
26x12.00R12	6L0915	4	25.8	11.4	9.50	1760	20	32.6

[^]Tires will remain Carlisle branded until further notice

* Max load @ 5 MPH

ULTRA TRAC

The Ultra Trac tire is the right approach for those specialized applications where high flotation and turf preservation is essential. With a wide, flat footprint and reduced void in the tread it offers maximum turf protection. Ultra Trac tires are most often utilized on golf and grounds maintenance equipment.

SIZE	PRODUCT CODE	PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 12.5 MPH	MAX PSI	TIRE WEIGHT
24x13.00-12	529368	4	23.0	12.9	10.50	1760*	18	26.7
24x13.00-12	529387	6	23.4	12.9	10.50	2270	28	28.0
26.5x14.00-12	529386	4	26.5	14.4	10.50	2150	18	33.1
29x14.00-15	5293E6	6	29.0	14.4	12.00	1710**	30	47.3

* Max load @ 10 MPH

** Max load @ 30 MPH



FAST TRAX

FAST TRAX®

CARLISLE

The Fast Trax tire offers increased traction combined with a low profile and is typically used on professional riding mowers where hillside traction is desired.

SIZE	PRODUCT CODE	PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 12.5 MPH	MAX PSI	TIRE WEIGHT
18x11.00-10	501043	4	17.7	9.7	8.50	1100	22	13.8

Tires in this product line will remain Carlisle branded until further notice



TURF CTR

TURF CTR

The Turf CTR tire is a broad shouldered, low impact tire used on professional ZTR mowers when treading lightly is critical.

SIZE	PRODUCT CODE	PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 12.5 MPH	MAX PSI	TIRE WEIGHT
22x11.00-8	511501	4	22.4	10.8	9.00	935	10	14.3



SMOOTH

STRAIGHT RIB

TRANSPORT VEHICLES, RIDING MOWERS, GARDEN TRACTORS, FARM EQUIPMENT AND WHEELBARROWS

SMOOTH

Commonly used on front swivel casters for professional ZTR mowers, the Smooth tire has tapered edges to facilitate easy swivel action without turf damage. The Smooth tire contains specially formulated rubber compounds for professional grade durability.

SIZE	PRODUCT CODE	PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 10 MPH	MAX PSI	TIRE WEIGHT
8x3.00-4	5120081	4	8.2	2.9	2.50	120*	30	1.6
9x3.50-4	5120101	4	8.9	3.7	2.50	260	50	2.5
11x4.00-5	5120111	4	11.2	4.1	3.00	330	46	2.9
11x6.00-5	5100521	4	11.5	4.7	3.25	455	42	4.4
11x6.00-5	6L09291	2	11.5	5.0	3.00	245	22	3.9
13x5.00-6	5120211	4	12.7	4.8	3.50	440	40	4.2
13x6.50-6	5121861	4	12.9	5.9	4.50	480	28	5.0
15x6.00-6	6L09491	4	14.5	6.1	4.50	565	30	5.2
4.80-8	5120511	4	16.8	4.8	3.75	760	70	4.2
18x9.50-8	5109811	4	17.8	9.3	7.00	1020	24	11.0
18x10.50-10	6L0149	4	18.4	9.3	7.75	1100	24	13.2
20x10.00-10	586325	2	19.5	9.5	8.50	825	12	12.9

* Max load @ 12.5 MPH

STRAIGHT RIB

The Straight Rib tire is designed with tread grooves to channel moisture away from the contact patch and provides a slight lateral traction which can be helpful when traversing mild inclines.

SIZE	PRODUCT CODE	PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 10 MPH	MAX PSI	TIRE WEIGHT
11x4.00-5	5180111^	4	11.1	4.2	3.00	330	46	3.3
13x5.00-6	5180211	4	12.8	4.7	3.50	440	40	4.1
13x6.50-6	5181861^	4	13.0	5.9	4.50	480	28	5.0
15x6.00-6	5180311^	4	14.4	6.1	4.50	565	30	5.9
16x6.50-8	5180961^	4	16.0	6.5	5.38	615	28	6.7
18x9.50-8	5180811^	4	17.7	9.3	7.00	1020	24	9.8
20x10.00-10	5181161^	4	20.0	8.8	6.00	1170	22	14.1
26x12.00-12	518711^	4	25.0	11.7	10.50	1760	20	20.7

[^]Tires will remain Carlisle branded until further notice



AT101 CHEVRON

CARLISLE

AT101 CHEVRON

AT101 Chevron is a specialty lug design with bars that taper in the shoulder area. This feature, along with muted lug depth, allows it to be used as a drive tire on zero turn mowers when extra traction is needed.

SIZE	PRODUCT CODE	PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 12.5 MPH	MAX PSI	TIRE WEIGHT
21x11.00-8	599044^	4	21.0	10.8	8.50	1390	22	18.5
21x11.00-10	599050	4	20.9	10.4	8.50	1390*	22	15.7
24x12.00-12	560352^	4	24.0	12.0	9.50	1710	20	22.3

[^]Tires will remain Carlisle branded until further notice

* Max load @ 10 MPH



WHEELBARROW

RIDING MOWERS, GARDEN TRACTORS, SNOW THROWERS, AND TILLERS

WHEELBARROW

CARLISLE

The Wheelbarrow tire is a versatile utility tire. Its rib design provides lateral traction. This tire is an excellent choice for lawn carts, spreaders and wheelbarrows.

SIZE	PRODUCT CODE	PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 10 MPH	MAX PSI	TIRE WEIGHT
4.00-6	5134371	2	13.7	4.0	2.50	330	30	2.3
4.80-8	5130511	4	16.5	4.6	3.75	760	70	4.1

Tires in this product line will remain Carlisle branded until further notice




STUD

UTILITY CARTS, WHEELBARROWS, PRESSURE WASHERS, GENERATORS, HAND TRUCKS, LAWN EQUIPMENT, AND FUN CARTS**STUD****CARLISLE**

With its aggressive appearance, the Stud tire grips on a multitude of terrains including soft dirt and snow. Commonly used for utility applications, such as hand trucks, power washers and industrial carts.

SIZE	PRODUCT CODE	PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 10 MPH	MAX PSI	TIRE WEIGHT
4.10-4	5160251^	2	10.6	3.6	2.50	225	24	2.4
4.10-6	5160351	2	12.5	3.9	3.25	290	24	2.7
4.80-8	5160501^	2	16.4	4.7	3.75	440	20	4.6
4.80-8	5164291^	4	16.3	4.7	3.75	675	42	6.1

[^]Tires will remain Carlisle branded until further notice

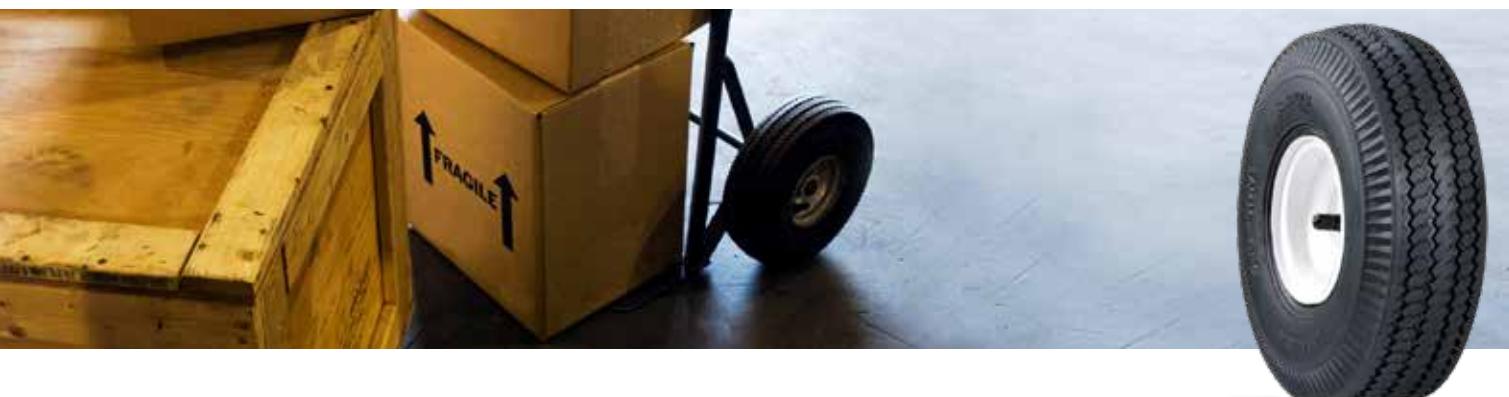

SAWTOOTH

SAWTOOTH®**CARLISLE**

The Sawtooth tire delivers smooth rolling performance for utility based equipment. Commonly used for wheelbarrows, pressure washers, generators, hand trucks and lawn equipment, the Sawtooth tire is utilized in various applications.

SIZE	PRODUCT CODE	PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 10 MPH	MAX PSI	TIRE WEIGHT
4.10-4	5190251	2	10.6	3.6	2.50	225	24	2.4
4.10-4	5190261	4	10.6	3.7	2.50	355	50	2.7
4.10/3.50-6	5190361	4	13.1	4.2	3.25	495	85	4.0
5.30/4.50-6	519067	6	14.6	5.3	3.50	880	95	5.6
4.80/4.00-8	5190501	2	16.0	4.6	3.75	505	35	4.8

Tires in this product line will remain Carlisle branded until further notice



RIDING MOWERS, GARDEN TRACTORS, SNOW THROWERS, AND TILLERS

SUPER LUG, POWER TRAC AND TRU POWER



Super Lug, Power Trac and Tru Power tires are most often found on garden tractors, tillers and trenchers. This powerful line is the right choice whenever the application requires substantial traction.

TIRE	SIZE	PRODUCT CODE	PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 12.5 MPH	MAX PSI	TIRE WEIGHT
Super Lug	13x5.00-6	5100201	2	13.1	4.5	3.50	290	20	4.0
Super Lug	14x4.50-6	5100251	2	14.5	4.4	3.25	320	20	3.9
Super Lug	16x6.50-8	5100961	4	16.5	6.3	5.38	615	28	8.1
Super Lug	18x9.50-8	5100811	4	18.3	8.6	7.00	1020	24	14.0
Super Lug	20x10.00-8	6L03301	4	20.1	10.0	7.00	1200	22	16.7
Power Trac	4.80-8	5109501	2	16.2	4.1	2.50	440*	20	5.3
Tru Power	18x8.50-10	5233111	4	18.1	7.8	6.00	825	22	11.5
Tru Power	6.00-12	5233C3	4	22.8	5.5	4.00	585*	28	12.8
Tru Power	23x8.50-12	523301	4	22.6	8.3	7.00	1100	22	16.3
Tru Power	23x10.50-12	523367	4	23.3	10.0	8.50	1390	20	25.4
Tru Power	26x12.00-12	523361	4	25.6	12.3	10.50	1760	20	32.4
Tru Power	26x12.00-12	523360	8	25.6	12.3	10.50	3000	42	38.4
Tru Power	29x12.50-15	5233D4	6	29.8	11.9	10.00	1650**	30	42.9
Tru Power	31x15.50-15	5233A4	8	31.4	15.1	13.00	2760**	45	73.3

Tires in this product line will remain Carlisle branded until further notice

* Max load at 10 MPH

** Max load at 30 MPH



NEW!



Carlstar Tires featuring Titan VPO Variable Pressure Operation Technology, are designed to operate at ZERO PSI while still maintaining the ability to put air in when extra load-carrying capacity is needed. At nearly $\frac{1}{2}$ the price of other non-pneumatic airless options in the market, VPO Technology is an affordable solution to keep you rolling.



CURRENTLY AVAILABLE IN SELECT OUTDOOR POWER EQUIPMENT PRODUCTS



FLAT PROOF THAT RUNS AT ZERO PSI



LESS HEAT BUILDUP



LOW MAINTENANCE & REDUCED DOWNTIME



SHOCK ABSORBING



TIME SAVING

VPO INVICTUS - NEW!

Enjoy enhanced traction and grip on hills with slip resistance in wet conditions, while experiencing a smoother ride and less downtime. Ideal for riding, zero-turn, and walk-behind mowers or other mowing applications.

ASSEMBLY	TIRE SIZE	WHEEL SIZE	OFFSET	BOLT PATTERN
VAL1400007	24x12-14	14x10	-1.5	5/4.5
VAL1400008	24x12-14	14x10	-1.5	4/4
VAL1400009	24x12-14	14x10	-1	4/4
VAL1400010	24x12-14	14x10	-1	5/4.5
VAL1400011	24x12-14	14x10	-2.3	4/4
VAL1400012	24x12-14	14x10	-2.3	5/4.5
VAL1600013	26x12-16	16x10	-0.87	4/4
VAL1600014	26x12-16	16x10	-0.87	5/4.5
VAL1600015	26x12-16	16x10	-2.3	4/4
VAL1600016	26x12-16	16x10	-2.3	5/4.5

VPO TURF MASTER - NEW!

With contoured shoulder protection and deep tread lugs for stability and traction, this durable compound is perfect for zero-turn radius (ZTR) and professional-grade mowers.

ASSEMBLY	TIRE SIZE	WHEEL SIZE	OFFSET	BOLT PATTERN
VAL1400001	24x12-14	14x10	-1.5	5/4.5
VAL1400002	24x12-14	14x10	-1.5	4/4
VAL1400003	24x12-14	14x10	-1	4/4
VAL1400004	24x12-14	14x10	-1	5/4.5
VAL1400005	24x12-14	14x10	-2.3	4/4
VAL1400006	24x12-14	14x10	-2.3	5/4.5
VAL1600017	26x12-16	16x10	-0.87	4/4
VAL1600018	26x12-16	16x10	-0.87	5/4.5
VAL1600019	26x12-16	16x10	-2.3	4/4
VAL1600020	26x12-16	16x10	-2.3	5/4.5

VPO SMOOTH - COMING SOON!

With a flat tread design to minimize turf damage and a wide footprint to reduce ground pressure, this durable option is ideal for professional-grade ZTR mowers. It offers effortless swivel action without tearing up grass, suitable for various applications like riding mowers and garden tractors.

SIZES AND SPECIFICATION COMING SOON!



VPO INVICTUS

VPO TURF MASTER

VPO SMOOTH
(COMING SOON)



RELIANCE TIRES AND ASSEMBLIES

Semi-pneumatic technology offers a flat-free, airless solution that ensures no downtime, featuring an air pocket built into the tire for enhanced ride comfort.

TIRE ONLY:

TREAD	SIZE	PRODUCT CODE	DIAMETER	WIDTH	WHEEL SIZE	MAX LOAD @ 10 MPH	TIRE WEIGHT
Smooth	15x6.00-6	5400001	14.2	5.8	6x4.50	570	14.11
Smooth	9x3.50-4	5410011	9	3.2	4x2.25	260	4.08
Smooth	13x5.00-6	5410031	12.4	4.66	6x3.25	440	9.7
Smooth	13x6.50-6	5410041	12.65	5.8	6x4.50	460	12.13
Smooth	11x4.00-5	5410061	10.97	4.17	5x3.20	325	6.83
Smooth	8x3.00-4	5410111	8.21	3	4x2.25	120	2.87
Rib	13x6.50-6	5410161	12.88	5.3	6x4.50	460	11.57
Rib	15x6.00-6	5410191	14.2	5.8	6x4.50	570	13.67

COMPLETE ASSEMBLIES:

SIZE	PRODUCT CODE	TREAD	HUB	BEARINGS	DIAMETER	WIDTH	WEIGHT CAPACITY	HUB COLOR
9x3.50-4	339951	Smooth	4	5/8"	9	3.2	260	SCAG Orange
11x4.00-5	339961	Smooth	4.88	5/8"	10.97	4.17	325	SCAG Orange
11x4.00-5	378271	Smooth	5	3/4"	10.97	4.17	325	Silver
11x4.00-5	378351	Smooth	3.625	3/4"	10.97	4.17	325	White
13x6.50-6	438481	Smooth	5.725	5/8"	12.88	5.3	460	John Deere Yellow
9x3.50-4	457031	Smooth	3.5	3/4"	9	3.2	260	White
9x3.50-4	457061	Smooth	4.25	3/4"	9	3.2	260	White
9x3.50-4	457071	Smooth	4	3/4"	9	3.2	260	White
9x3.50-4	457081	Smooth	4	5/8"	9	3.2	260	White
13x5.00-6	457211	Smooth	5.625	*	12.4	4.66	440	White
13x6.50-6	457291	Smooth	7.25	*	12.65	5.8	460	White
11x4.00-5	462611	Smooth	4.56	3/4"	10.97	4.17	325	SCAG Orange
15x6.00-6	473461	Smooth	6.94	5/8"	14.2	5.8	570	John Deere Yellow
15x6.00-6	483921	Smooth	7.25	3/4"	14.2	5.8	570	Kubota Orange
13x6.50-6	488181	Smooth	7.25	3/4"	12.65	5.8	460	SCAG Orange
13x5.00-6	488191	Smooth	5.625	3/4"	12.4	4.66	440	SCAG Orange
13x6.50-6	489951	Smooth	6.75	*	12.65	5.8	460	Toro Storm Gray
13x6.50-6	489961	Smooth	6.75	*	12.65	5.8	460	White
11x4.00-5	493531	Smooth	4.625	3/4"	10.97	4.17	325	Glossy Black
8x3.00-4	600711	Smooth	3.5	5/8"	8.21	3	120	White
11x4.00-5	632401	Smooth	5	3/4"	10.97	4.17	325	White
9x3.50-4	457051	Smooth	3.25	3/4"	9	3.2	260	White
13x5.00-6	492691	Smooth	5	*	12.4	4.66	440	White
11x4.00-5	SAL0500007	Smooth	4.188	3/4"	10.97	4.17	325	Silver

*Tapered cup only bearings not included

**HAND TRUCKS, WHEELBARROWS, TURF AND CHORE APPLICATIONS****FLAT FREE****CARLISLE**

Carlisle branded flat free full assemblies are made with solid micro-cellular polyurethane material to reduce flat returns. With its flat-free technology, no maintenance is required.

SIZE	PRODUCT CODE	TREAD	HUB	BEARINGS	DIAMETER	WIDTH	ASSEMBLY WEIGHT	WEIGHT CAPACITY	CASE QTY
Universal Wheelbarrow	483791	Ribbed	3" Centered	5/8" BB	14.5	3.2"	6.2 lbs.	300 lbs.	4
Universal Hand Truck	483811	Sawtooth	2.25" Offset	5/8" BB	10.3"	3.2"	3.8 lbs	300 lbs.	4
2.80/2.50-4	483871	Sawtooth	3" Centered	1/2" PBB	8.4"	3"	2.7 lbs	275 lbs.	6
9x3.50-4	483831	Smooth	4" Centered	3/4" Bushings	9.1"	3.2"	4 lbs.	300 lbs.	6
4.10/3.50-4	483801	Sawtooth	2.25" Offset	5/8" PBB	10.3"	3.5"	3.5 lbs.	300 lbs.	6
11x4.00-5	483821	Smooth	5" Centered	5/8" Bushings	10.8"	4"	5.4 lbs.	350 lbs.	6
4.00-6	483771	Ribbed	3" Centered	5/8" PBB	13.2"	3.5"	4.4 lbs.	300 lbs.	6
13x5.00-6	483851	Turf	3" Centered	3/4" Bushings	13.2"	4.5"	8 lbs.	400 lbs.	3
13x6.50-6	483841^	Turf	3" Centered	3/4" Bushings	13.5"	6.3"	11 lbs.	400 lbs.	3
15x6.50-6	483861^	Turf	3" Centered	3/4" Bushings	14.1"	6.3"	12 lbs.	500 lbs.	3
4.80/4.00-8	483761^	Ribbed	6" Centered	5/8" PBB	15.5"	3.7"	8 lbs.	500 lbs.	6
4.80/4.00-8	483781^	Ribbed	3" Centered	3/4" PBB	15.5"	3.7"	7.3 lbs.	500 lbs.	6
11x4.00-5	SAL0500019	Smooth	3" Centered	3/4" Bushings	11"	4"	5.4 lbs.	225 lbs.	6
11x6.00-5	SAL0500020	Smooth	5.875" Centered	3/4" Bushings	10.9"	5.2"	6.4 lbs.	350 lbs.	4
13x5.00-6	SAL0600021^	Smooth	3.25" Centered	3/4" Bushings	13"	4.7"	7.1 lbs.	300 lbs.	4
13x6.50-6	SAL0600022	Smooth	3" Centered	3/4" Bushings	13.4"	5.8"	10.3 lbs.	300 lbs.	4
15x6.00-6	PAL0600108	Turf Saver	2.95" Offset	3/4" Bushings	14.2"	5.9"	8.9 lbs.	400 lbs.	4

[^]Tires will remain Carlisle branded until further notice



GOLF CARS AND UTILITY VEHICLES

TOUR MAX®



The Tour Max tire is a smooth riding tire designed primarily for golf cars and closed community vehicles. The tread pattern, rubber compound and tire construction provide durability as well as ride comfort on hard surface paths.

SIZE	PRODUCT CODE	PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 30 MPH	MAX PSI	TIRE WEIGHT
205/50-10	5191461	LRB	18.7	7.6	6.00	675	30	11.8

Tires in this product line will remain Carlisle branded until further notice

LINKS®

The Links tire is a premier tire for the golf car market featuring a wide footprint, strong sidewall and wear-resistant rubber compound providing unmatched stability and durability.

SIZE	PRODUCT CODE	PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 10 MPH	MAX PSI	TIRE WEIGHT
18x8.50-8	5192711	4	17.4	8.6	7.00	825	22	11.7

FAIRWAY PRO



The Fairway Pro tire is an excellent value providing long hours of dependable performance on the course or park grass.

SIZE	PRODUCT CODE	PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 10 MPH	MAX PSI	TIRE WEIGHT
18x8.50-8	5189761	4	18.2	8.4	7.00	825	22	11.5

CLASSIC RB



Classic RB is a high load capacity tire with a broad footprint for maximum turf protection.

SIZE	PRODUCT CODE	PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 10 MPH	MAX PSI	TIRE WEIGHT
18x9.50-8	5832D8	10	17.6	8.7	7.00	1760	60	14.6

Tires in this product line will remain Carlisle branded until further notice

TURF GLIDE



One of the original golf car tires, the Turf Glide tire has a tall sidewall to absorb impact and a turf-friendly round contour profile.

SIZE	PRODUCT CODE	PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 10 MPH	MAX PSI	TIRE WEIGHT
8.00-6*	508040	4	17.6	7.1	3.25	410	20	8.0

Tires in this product line will remain Carlisle branded until further notice

*Tube Type Tire



INDUSTRIAL TRAX

HARD SURFACE UTILITY VEHICLE**INDUSTRIAL TRAX****CARLISLE**

The Industrial Trax tire is designed for hard surface utility vehicle applications such as concession vehicles on golf courses.

SIZE	PRODUCT CODE	PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 10 MPH	MAX PSI	TIRE WEIGHT
20x10.00-10	599581^	4	20.0	10.0	8.00	1170	22	13.7
23x10.50-12	599045^	4	22.5	10.4	8.50	1340*	20	22.9
25x10.50-12	560446	6	25.2	10.3	7.00	1980	30	29.2

[^]Tires will remain Carlisle branded until further notice

* Max load at 12.5 MPH



SNOW HOG

SNOW HOG**CARLISLE**

With its distinctive "X" shaped tread elements, the Snow Hog tire has an aggressive design made to plow through soft terrain. Used primarily for snow-blowers.

SIZE	PRODUCT CODE	PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 10 MPH	MAX PSI	TIRE WEIGHT
4.10-6	5170051	2	12.8	4.0	3.25	290*	24	3.2
15x5.00-6	5170081^	2	14.8	5.0	3.50	410	20	4.8
4.80-8	5170011	2	16.2	4.7	3.75	440	20	5.5
16x6.50-8	5170021^	2	16.4	6.2	5.38	410*	14	6.2
18x6.50-8	5170101^	4	17.2	6.6	5.38	760	28	7.6

[^]Tires will remain Carlisle branded until further notice

* Max load at 12.5 MPH



XTRAC

RIDING MOWERS, GARDEN TRACTORS, SNOW THROWERS, TILLERS, ATVS AND UTILITY VEHICLES

XTRAC®

The XTRAC tire is excellent for snow throwing equipment and other applications requiring aggressive traction. It features a unique lug design for traction across the entire face of the tire.

SIZE	PRODUCT CODE	PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 10 MPH	MAX PSI	TIRE WEIGHT
13x4.00-6	5170151	2	12.8	4.0	3.25	280	22	3.5
15x5.00-6	5170171	2	14.6	5.1	3.50	395	20	5.3
4.80-8	5170111	2	16.6	4.7	3.75	440	20	5.8
16x6.50-8	5170181	2	16.4	6.0	5.38	410	14	7.0



All Purpose



AT489



AT489 II



489 XD®



TRAIL WOLF®



DURA TRAIL®



A-C-T



STRYKER®



WORKMATE®



WORKMATE® H/S



PXT2

Mud



BLACK ROCK®



A-C-T HD





Sport / Performance



VERSATRAIL® ATR 32



VERSATRAIL® XTR 32



VERSATRAIL® XD 32

Hard Pack / Turf



ALL TRAIL® 33



ALL TRAIL® II 33



HD FIELD TRAX 34



KNOBBY 34



TURF TAMER 34





AT489

UTILITY VEHICLES, SIDE BY SIDE VEHICLES

AT489

The AT489 tire is a popular original equipment replacement tire and strikes a great balance between lightweight and puncture resistance. It has outstanding grip on loose terrain without giving up the comfortable ride on hard-packed surfaces, soft surfaces and mud.



SIZE	PRODUCT CODE	STAR/PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 50 MPH	MAX PSI	TREAD DEPTH (32nds)	TIRE WEIGHT
22x9.50-10	5793N1	4	22.0	9.5	7.00	600	14	19	15.8
22x11.00-10	5893H5	4	22.8	10.2	9.00	600	12	19	16.0
AT23x7.00-10	5893M0	2*	23.0	7.0	5.50	240	5	19	11.6
AT23x8.00-11	5893O4	3*	23.5	7.5	6.50	290	7	19	14.1
24x12.00-10	5793A6	4	24.0	12.0	9.50	1050	20	19	23.0
24x9.50-10	5793P2	4	24.2	9.6	7.80	855	22	19	17.8
AT24x11.00-10	5893O5	3*	24.0	10.0	9.00	440	7	19	17.0
AT24x9.00-11	5893A9	3*	24.0	8.9	7.00	365	7	19	17.2
AT24x10.00-11	5893Z8	3*	24.6	9.6	8.00	395	7	19	18.0
24x8.00-12	6P0819	4	24.0	7.5	6.50	505	12	19	14.0
24x9.00-12	6P0818	4	24.3	8.5	7.00	565	12	19	16.8
AT24x11.00-12	589344	3*	24.0	10.9	9.00	430	7	19	20.3
AT25x11.00-10	589308	3*	25.7	10.5	9.00	455	7	19	21.0
25x8.00-12	589306	4	25.1	7.5	6.50	495	10	19	14.1
25x10.00-12	589335	4	25.3	9.0	8.00	600	10	19	17.0
25x11.00-12	589351	4	25.4	10.5	9.00	1050	22	19	20.1

"AT" tires are Star Rated and are designed for ATV applications



AT 489 II

489 XD



AT489 II

The AT489 II tire is the next generation of the original AT489. It features dependable performance for a wide range of terrain conditions like soft to intermediate surfaces. Made in the USA.

SIZE	PRODUCT CODE	STAR/PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 50 MPH	MAX PSI	TREAD DEPTH (32nds)	TIRE WEIGHT
AT26x8.00-14	560565	3*	26.0	7.8	6.00	355	7	20	16.6
AT26x10.00-14	560568	3*	26.3	9.8	8.00	430	7	20	21.9
27x9.00-12	6P0371	6	27.2	9.0	7.00	740*	32	20	21.0
27x11.00-12	6P0372	6	27.4	11.4	9.00	880*	34	20	30.2

"AT" tires are Star Rated and are designed for ATV applications

* Max load at 75 MPH


489 XD

The 489 XD tire is designed for today's UTV. With a bias construction and v-shape lug, this tire helps maintain a smooth ride in various terrains. The 489 XD is ideal for demanding applications. Made in the USA.



SIZE	PRODUCT CODE	STAR/PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 68 MPH	MAX PSI	TREAD DEPTH (32nds)	TIRE WEIGHT
25x8.00-12	6P1710	8	25.1	7.5	6.50	520	20	24	19.0
25x11.00-12	6P1711	8	25.8	10.5	8.00	695	20	24	26.0
26x8.00-12	6P1712	8	26.2	7.9	7.00	565	20	24	20.8
26x9.00-12	6P1713	8	26.2	9.4	7.00	615	20	24	21.6
26x11.00-12	6P1714	8	25.6	10.8	8.00	715	20	24	27.8
27x9.00-12	6P1715	8	27.3	9.1	8.00	660	20	24	22.5
27x11.00-12	6P1716	8	27.4	10.9	8.00	760	20	24	29.0
27x9.00-14	6P1989	8	27.5	8.5	7.00	910*	20	25	24.9
27x11.00-14	6P1990	8	27.8	10.3	9.00	1095*	20	25	32.5

* Max load at 50 MPH

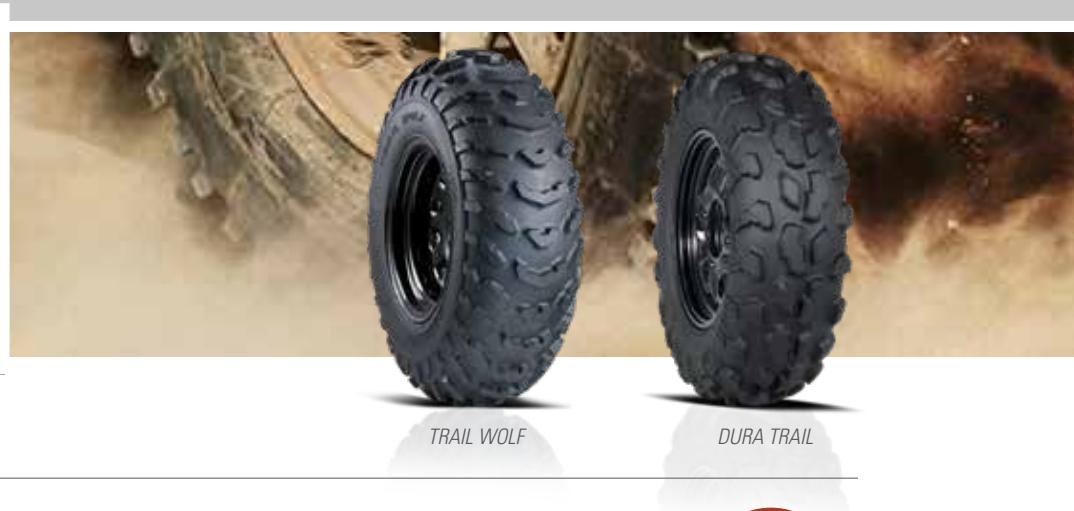

UTILITY VEHICLES, SIDE BY SIDE VEHICLES

TRAIL WOLF®

The Trail Wolf tire features a deep, wrap around tread that promotes forward traction while minimizing lateral slip. Trail Wolf is made with stiff sidewalls that increase cornering control and a compound formulated for extended wear.



SIZE	PRODUCT CODE	STAR/PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 62 MPH	MAX PSI	TREAD DEPTH (32nds)	TIRE WEIGHT
19x8.00-8	5370386	4	19.2	7.0	6.00	265	10	10	9.6
20x11.00-9	5370346	4	19.8	10.5	9.00	395	10	16	13.9
22x10.00-9	5370556	4	22.9	10.0	8.00	410	10	16	17.0
25x12.00-9	5370826	4	25.9	11.8	9.00	585	10	20	24.2
AT19x7.00-8	5370371	1*	19.0	6.8	5.50	143*	4	9	8.1
AT20x7.00-8	5370391	1*	19.5	6.9	5.50	157*	4	9	8.7
20x11.00-10	5100156	4	20.1	10.1	9.00	385	10	16	13.4
21x7.00-10	5370846	4	21.4	6.7	5.50	265	10	14	12.9
22x7.00-10	5370486	4	22.0	6.6	5.50	290	10	14	13.5
22x10.00-10	5370496	4	22.6	9.4	8.00	410	10	16	18.1
22x7.00-11	5370546	4	22.0	6.7	5.50	290	10	16	13.2
25x8.00-12	5EE1001	4	25.2	7.5	6.00	385**	22	19	16.4
25x10.00-12	5EE1011	4	25.9	9.3	8.00	465**	22	19	19.9

"AT" tires are Star Rated and are designed for ATV applications

* Max load at 50 MPH

** Max load at 81 MPH

DURA TRAIL®

The Dura Trail is an all purpose tire ideal for hard pack, desert, rocks/ruts. and intermediate terrains. It's wrap around lugs provide improved shoulder protection and the super deep rim guard feature offers wheel lip protection making it ideal for the modern ride. Made in the USA.



SIZE	PRODUCT CODE	STAR/PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 81 MPH	MAX PSI	TREAD DEPTH (32nds)	TIRE WEIGHT
25x8.00R12	6P1665	8	25.3	8.3	7.00	355	20	25	25.2
25x10.00R12	6P1666	8	25.6	10.3	8.00	430	20	25	30.9
26x9.00R12	6P1667	8	26.6	9.2	7.00	430	20	25	26.8
26x11.00R12	6P1668	8	27.3	10.4	8.00	505	20	25	33.2
27x9.00R14	6P1669	8	27.0	9.1	7.00	440	20	20	25.5
27x11.00R14	6P1670	8	27.6	11.0	9.00	520	20	20	32.8



UTILITY VEHICLES, SIDE BY SIDE VEHICLES

A-C-T

The A-C-T tire features advanced radial construction to absorb trail hazards and ride disturbances. The radial design increases both traction and ride quality. The A-C-T tire has an aggressive open lug tread pattern with a $\frac{3}{4}$ inch tread depth. Made in the USA.

SIZE	PRODUCT CODE	STAR/PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 50 MPH	MAX PSI	TREAD DEPTH (32nds)	TIRE WEIGHT
AT25x8.00R12	560425	3*	25.0	7.8	6.50	340	7	24	16.7
AT25x11.00R12	560426	3*	25.7	10.6	8.00	455	7	24	23.3
26x8.00R12	560441	4	26.3	7.9	6.50	385*	10	24	17.8
26x10.00R12	560442	4	26.6	10.4	8.00	455*	10	24	24.4

"AT" tires are Star Rated and are designed for ATV applications

* Max load at 68 MPH



ATVS, UTILITY VEHICLES, SIDE BY SIDE VEHICLES

STRYKER®

The Stryker tire features a unique offset chevron pattern that is self-cleaning with great performance in all terrains. Made in the USA.

CARLISLE



SIZE	PRODUCT CODE	STAR/PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 50 MPH	MAX PSI	TREAD DEPTH (32nds)	TIRE WEIGHT
AT22x11.00-8	531073	2*	22.8	11.1	9.00	330	5	19	21.2
22x9.00-10	516091	4	22.8	9.4	6.00	675	20	20	19.9
AT22x11.00-10	531095	2*	22.9	10.1	8.00	330	5	19	19.2

Tires in this product line will remain Carlisle branded until further notice

"AT" tires are Star Rated and are designed for ATV applications

WORKMATE®

The Work Mate offers the perfect balance of traction, stability, and control for your utilitarian UTV needs. The tough 8 ply rating provides the puncture and impact resistance needed in demanding applications.



SIZE	PRODUCT CODE	STAR/PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 50 MPH	MAX PSI	TREAD DEPTH (32nds)	TIRE WEIGHT
23x11.00-10	6P16361	8	26.2	8.9	7.00	1025	26	21	30.6



WORKMATE H/S

PXT2

ATVS, UTILITY VEHICLES, SIDE BY SIDE VEHICLES

WORKMATE® H/S - NEW!

The Workmate H/S is designed for enhanced stability, improved steering, quieter rides, and reliable traction in various conditions. It features reinforced belts for puncture resistance and an 8-ply radial construction for comfort and stability, even with heavy loads.



SIZE	PRODUCT CODE	STAR/PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 50 MPH	MAX PSI	TREAD DEPTH (32nds)	TIRE WEIGHT
25x8.00R12	6P20151	8	25.0	7.8	6.00	330*	26	21	23.2
25x10.00R12	6P20141	8	25.1	9.6	8.00	410*	26	22	29.5
27x9.00R14	6P20521	8	27.5	8.7	7.00	1050	26	21	28.1
27x11.00R14	6P20531	8	27.7	10.6	9.00	1280	26	22	32.8
26x9.00R12	6P20561	8	26.2	8.9	7.00	1025	26	21	30.6
26x11.00R12	6P20571	8	26.3	11.1	9.00	1225	26	22	37.0
26x9.00R14	6P20541	8	26.3	8.8	7.00	985	26	21	29.4
26x11.00R14	6P20551	8	26.7	10.7	9.00	1195	26	22	31.2

* Max load at 87 MPH

PXT2

Designed for heavy payload applications, the PXT2 is a non-directional tire with specific front and rear sizing configurations.



SIZE	PRODUCT CODE	STAR/PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 50 MPH	MAX PSI	TREAD DEPTH (32nds)	TIRE WEIGHT
26x9.00-12	6P05861	6	26.0	8.4	6.50	930	22	20	23.1
26x11.00-12	6P05871	6	26.1	10.3	8.00	1165	24	20	26.7



BLACK ROCK

A-C-T HD

CARLISLE**BLACK ROCK®**

Designed to balance ride quality with an aggressive $\frac{3}{4}$ inch tread depth, the Black Rock tire is built to handle any trail conditions while also providing a smooth ride. Made in the USA.

SIZE	PRODUCT CODE	STAR/PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 50 MPH	MAX PSI	TREAD DEPTH (32nds)	TIRE WEIGHT
AT25x8.00-12	560538	3*	25.0	8.0	6.50	340	7	23	17.9
AT25x10.00-12	560540	3*	25.3	9.5	8.00	420	7	24	20.3
AT26x9.00-12	560539	3*	26.0	8.5	7.00	410	7	23	19.0
AT26x11.00-12	560541	3*	26.2	11.0	9.00	480	7	24	23.2

Tires in this product line will remain Carlisle branded until further notice
"AT" tires are Star Rated and are designed for ATV applications

A-C-T HD

The A-C-T HD tire is a 6 ply rated radial tire with higher pressure, load capacities and larger sizes than the original A-C-T tire. This tire features increased carcass strength for less sidewall flex and self-cleaning tread design. Made in the USA.



SIZE	PRODUCT CODE	STAR/PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 50 MPH	MAX PSI	TREAD DEPTH (32nds)	TIRE WEIGHT
25x8.00R12	560481	6	25.9	7.7	6.50	695	18	33	21.2
25x11.00R12	560482	6	25.8	10.5	9.00	935	18	33	26.6
26x9.00R12	560465	6	26.7	8.6	7.00	825	18	32	25.0
26x11.00R12	560466	6	27.2	10.5	9.00	965	18	32	29.2
27x9.00R12	560472	6	27.5	8.9	7.00	880	18	32	25.6
27x11.00R12	560473	6	27.5	10.6	9.00	1020	18	32	31.1

"AT" tires are Star Rated and are designed for ATV applications



ATVs, UTILITY VEHICLES, SIDE BY SIDE VEHICLES

VERSA TRAIL SERIES

The Versa Trail tire is an all-purpose, radial tire that increases terrain versatility and optimizes traction without compromising comfort and handling. Its "Tough-Tread" rubber compound and durable 6-ply rated construction protects against cuts, chips and tread wear to ensure unequaled puncture resistance.

CARLISLE



Series	Size	Product Code	Star/ Ply	Diameter	Width	Rim Width	Max Load @ 87 MPH	Max PSI	Tread Depth (32nds)	Tire Weight
Versa Trail ATR	25x8.00R12	6P1270	6	24.8	8.2	6.50	340	34	24	22.5
Versa Trail ATR	25x10.00R12	6P1271	6	25.4	9.7	8.00	420	32	24	25.7
Versa Trail ATR	26x9.00R12	6P1272	6	26.4	9.2	7.00	440	32	24	28.3
Versa Trail ATR	26x11.00R12	6P1273	6	26.8	11.1	9.00	550	34	24	32.2
Versa Trail ATR	27x9.00R12	6P02681	6	26.9	9.0	7.00	480	32	24	26.6
Versa Trail ATR	27x11.00R12	6P02691	6	27.7	11.2	9.00	585	34	24	29.0
Versa Trail ATR	27x9.00R14	6P1274	6	27.3	8.9	7.00	805	32	24	28.0
Versa Trail ATR	27x11.00R14	6P1275	6	27.3	10.9	9.00	935	34	24	30.9
Versa Trail ATR	28x10.00R14	6P0276	6	28.4	10.1	8.00	535	32	24	30.2
Versa Trail XTR	30x10.00R14	6P0871	8	30.7	9.7	7.00	600	32	24	42.6
Versa Trail XTR	32x10.00R14	6P0872	8	32.2	10.2	7.00	695	32	24	47.7
Versa Trail XD	26x10.00R12	6P1796^	8	26.4	10.1	8.00	430	26	24	31.4

[^]Tires will remain Carlisle branded until further notice



ALL TRAIL

ALL TRAIL II

ATVs, UTILITY VEHICLES, SIDE BY SIDE VEHICLES

ALL TRAIL®

The All Trail and All Trail II tire lines are specifically designed for use on hard surface conditions. The low, wide profile reduces soft wallowing chassis roll commonly experienced with other tires while its uniquely tight tread pattern offers a smooth ride experience. The specially formulated compound delivers durable extended tire life with responsive, predictable and level handling on pavement, concrete and hard-packed soil.



SIZE	PRODUCT CODE	STAR/PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 50 MPH	MAX PSI	TREAD DEPTH (32nds)	TIRES WEIGHT
22x11.00-10	510016	4	21.9	10.1	8.00	880	22	16	19.3
23x8.00-12	511506	4	23.7	8.4	6.50	675	22	19	19.9
23x10.50-12	511505	4	23.1	10.1	8.50	825	20	20	22.2
25x8.00-12	511507	4	24.8	8.4	7.00	785	22	19	18.6
25x10.00-12	6P0334	4	24.9	10.5	8.00	905	20	19	24.2
25x10.50-12	511508	4	24.8	10.1	7.00	935	20	20	24.1
27x9.00-14	6P0671	4	27.9	8.9	7.00	910	20	16	23.6
27x11.00-14	6P0672	4	28.1	11.0	9.00	1170	22	16	29.5

ALL TRAIL® II

SIZE	PRODUCT CODE	STAR/PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 50 MPH	MAX PSI	TREAD DEPTH (32nds)	TIRES WEIGHT
20x10.00-8	510043	4	19.8	9.4	8.00	715	22	14	16.2
22x10.00-8	510044	4	22.0	10.2	7.00	825	22	14	15.1
20x10.00-10	510045	4	20.3	8.2	6.00	695	22	14	14.0
22x9.50-10	55A3N1	4	22.0	9.6	8.00	585	14	14	15.0
23x11.00-10	6P0058	6	23.5	10.9	9.00	1230	34	17	19.9
24x9.50-10	55A3P2	4	24.0	9.5	7.50	870	22	14	16.7
24x10.50-10	55A3N9	4	24.3	10.8	8.00	900	20	14	19.3
25x9.00-12	560443	4	25.2	8.6	7.00	825	20	16	18.6
25x9.00-12	5E0587	6	25.4	8.5	6.00	1100	32	16	19.9
25x11.00-12	560444	4	25.5	10.8	9.00	1050	22	16	20.4
25x11.00-12	6P0333	6	25.5	11.2	9.00	1360	34	16	23.2
24x10.50-10	55A3N8	6	24.5	11.5	8.00	1230	36	14	22.2



ATVS, UTILITY VEHICLES, SIDE BY SIDE VEHICLES

HD FIELD TRAX

The HD Field Trax tire features a wide profile providing stability on hard-packed surfaces. With its non-directional tread pattern and long-lasting construction, the HD Field Trax tire delivers a smooth and comfortable ride while resisting cut, chips and abrasions.



SIZE	PRODUCT CODE	STAR/PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 50 MPH	MAX PSI	TREAD DEPTH (32nds)	TIRE WEIGHT
18x8.50-10	5883U1	4	18.0	7.8	7.00	495	22	14	10.9
AT22x12.00-8	5883B9	3*	21.3	12.0	9.50	430	7	20	22.9
AT22.5x10.00-8	5883B9	3*	22.7	10.0	8.00	365	7	20	20.6
24x12.00-12	560366	2	23.3	11.2	9.50	675	10	20	24.7
AT25x13.00-9	5883H4	3*	24.8	12.4	10.00	535	7	20	28.5
26x12.00-12	560467	2	25.4	12.2	9.50	760	10	20	25.2

"AT" tires are Star Rated and are designed for ATV applications

KNOBBY



The Knobby tire offers a unique design available in solid or dimple tread pattern. The Knobby tire delivers maximum performance on a variety of terrains and is ideal for ATVs and golf cars.



SIZE	PRODUCT CODE	STAR/PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 50 MPH	MAX PSI	TREAD DEPTH (32nds)	TIRE WEIGHT
AT145/70-6	5150021	1*	14.3	5.3	4.50	99	4	15	4.9
AT16x8.00-7	5150031^	3*	16.5	6.6	5.00	180	7	15	7.1
18x9.50-8	537005	2	18.3	8.8	7.00	365	10	15	10.4
22x11.00-8*	537050	2	22.3	10.5	9.00	565	10	15	13.9
AT25x12.00-9*	537081	2*	24.6	11.8	10.00	430	5	15	18.9

^aTires will remain Carlisle branded until further notice

"AT" tires are Star Rated and are designed for ATV applications

*Tires have a Knobby tread, and not the dimpled Knobby tread pattern shown above.

TURF TAMER



With its lightweight construction, stiff sidewalls and hollowed-out lugs, the Turf Tamer tire provides excellent handling in hard-packed conditions. Formulated for performance, the Turf Tamer tire's wide profile ensures stability around tight corners and traction for a variety of terrains. Made in the USA.

SIZE	PRODUCT CODE	STAR/PLY	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD @ 50 MPH	MAX PSI	TREAD DEPTH (32nds)	TIRE WEIGHT
AT22.5x10.00-8	55U3B9	3*	22.3	9.6	8.00	365	7	16	12.9
22.5x10.00-8	55U3C7	4	23.0	9.2	8.00	825	22	16	13.3
AT25x12.00-9	55U373	3*	25.1	11.0	10.00	495	7	16	16.7

Tires in this product line will remain Carlisle branded until further notice

"AT" tires are Star Rated and are designed for ATV applications



Trailer

ALL PURPOSE




RADIAL TRAIL® HD 38



ULTRA SPORT RH 38



SPORT TRAIL® 39



SPORT TRAIL® LH 39



CSL 16 ALL STEEL 40



USA TRAIL 40



SURE TRAIL 40



EXTRA GRIP 40



LPT 41



RADIAL TRAIL AT 41







RADIAL TRAIL HD

ULTRA SPORT RH

BOAT, CARGO, HORSE AND LIVESTOCK, RV, TOWABLE UTILITY, AND SPECIALTY TRAILERS

RADIAL TRAIL® HD

The Radial Trail HD tire is designed with a unique tread pattern that wears evenly over time. As the superior trailer tire in the industry, the Radial Trail HD tire is constructed with heat resistant technology and compliant with DOT standards.

SIZE	PRODUCT CODE	LOAD RANGE	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD	RECOM'D PSI	TREAD DEPTH (32nds)	SPEED RATING	TIRE WEIGHT
ST145/R12*	5151311	LRD	21.4	5.9	4.00	1220	65	9	87	15.4
ST145/R12*	5151321	LRE	21.4	6.0	4.00	1520	80	9	87	15.9
ST175/80R13	6H04511	LRC	24.1	7.0	5.00	1360	50	8	87	17.9
ST175/80R13	6H04521	LRD	24.1	7.0	5.00	1570	65	8	87	18.2
ST185/80R13	6H04531	LRC	24.7	7.2	5.00	1480	50	8	87	18.8
ST185/80R13	6H04541	LRD	24.7	7.2	5.00	1710	65	8	87	19.2
ST205/75R14	6H04551	LRC	26.1	7.8	5.50	1760	50	9	87	23.0
ST205/75R14	6H04561	LRD	26.1	7.8	5.50	2040	65	9	87	24.1
ST215/75R14	6H04571	LRC	26.7	8.3	6.00	1870	50	9	87	23.5
ST205/75R15	6H04581	LRC	27.1	7.8	5.50	1820	50	9	87	24.2
ST205/75R15	6H04591	LRD	27.1	7.8	5.50	2150	65	9	87	25.0
ST225/75R15	6H04611	LRD	28.3	8.6	6.00	2540	65	9	87	28.8
ST225/75R15	6H04621	LRE	28.1	8.6	6.00	2830	80	9	87	30.0
ST235/80R16	6H04631	LRE	30.8	9.0	6.50	3520	80	10	87	34.5
ST235/80R16	6H17461	LRF	30.7	9.2	6.50	3740	95	11	87	35.8
ST235/85R16	6H04641	LRE	31.7	9.3	6.50	3640	80	12	87	38.0
ST235/85R16	6H04651	LRF	31.7	9.3	6.50	3960	95	12	87	41.0
ST255/85R16	6H20211	LRE	33.1	10.0	7.00	4080	80	10	87	46.6

* Sizes with asterisks have the Radial Trail RH tread pattern

ULTRA SPORT RH

The Ultra Sport RH tire offers a low profile design with a high performance look. Its tire profile and tread formulation creates a lower rolling resistance ensuring stability on the road. Compliant with DOT standards.

SIZE	PRODUCT CODE	LOAD RANGE	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD	RECOM'D PSI	TREAD DEPTH (32nds)	SPEED RATING	TIRE WEIGHT
ST235/60R15	6H00901	LRD	26.2	9.2	7.00	2200	65	10	62	30.5



SPORT TRAIL (WIDE)

SPORT TRAIL (NARROW)

SPORT TRAIL LH

BOAT, CARGO, HORSE AND LIVESTOCK, RV, TOWABLE UTILITY, AND SPECIALTY TRAILERS

SPORT TRAIL®

CARLISLE

Sport Trail tire features a radial look with bias construction. The tread profile and formulation creates lower rolling resistance. Often used for towable utility and boat trailers, the Sport Trail tire is long-lasting for a safe travel

SIZE	PRODUCT CODE	LOAD RANGE	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD	RECOM'D PSI	TREAD DEPTH (32nds)	SPEED RATING	TIRE WEIGHT
4.80-8*	5193171	LRB	16.3	4.7	3.75	585	60	8	62	5.8
4.80-8*	5193181	LRC	16.3	4.9	3.75	760	90	8	62	6.7
5.70-8*	5193191	LRB	18.1	5.9	3.75	715	50	10	62	9.6
5.70-8*	5193201	LRC	18.4	6.0	3.75	910	75	10	62	10.2
5.70-8*	5100591	LRD	18.7	6.0	3.75	1070	100	10	62	11.9
16.5x6.5-8	5193481^	LRD	16.6	6.8	5.38	910	90	7	62	10.6
18.5x8.5-8	5193431	LRB	18.0	8.6	7.00	760	35	10	62	12.2
18.5x8.5-8	5193451	LRC	17.9	8.6	7.00	935	50	10	75	13.8
20.5x8.0-10	5193471	LRC	20.9	8.0	6.00	1100	50	10	62	16.1
20.5x8.0-10	5193491	LRD	20.7	8.3	6.00	1320	70	10	62	16.6
20.5x8.0-10	5193501	LRE	20.6	8.2	6.00	1520	90	10	81	17.6
20.5x8.0-10	5193511	LRF	20.8	8.4	6.00	1650	105	10	62	17.8

^Tires will remain Carlisle branded until further notice

*Sport Trail Narrow tread pattern

SPORT TRAIL® LH

Sport Trail LH tire brings an optimized tread pattern for larger bias trailer tires (>12" rim diameter). The tread and contour were designed to increase endurance, reduce heat build-up and maintain even wear for extended tread life.

SIZE	PRODUCT CODE	LOAD RANGE	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD	RECOM'D PSI	TREAD DEPTH (32nds)	SPEED RATING	TIRE WEIGHT
4.80-12	6H01291	LRB	20.6	5.0	4.00	785	60	6	87	8.3
4.80-12	6H01301	LRC	20.6	5.0	4.00	990	90	6	87	9.1
5.30-12	6H01391	LRB	21.6	5.3	4.00	855	55	6	87	9.6
5.30-12	6H01381	LRC	21.6	5.3	4.00	1050	80	6	87	10.1
ST175/80D13	6H01361	LRC	24.0	6.9	4.50	1360	50	8	81	18.1
ST185/80D13	6H01371	LRC	24.4	7.1	4.50	1480	50	8	87	26.6
ST185/80D13	6H02231	LRD	24.0	7.2	5.00	1710	65	8	87	20.2
ST205/75D14	6H01351	LRC	25.8	7.9	5.50	1760	50	8	87	20.5
ST215/75D14	6H01421	LRC	26.7	8.4	6.00	1870	50	8	81	22.7
ST205/85D14.5	6H01451	LRF	27.8	8.0	6.00	2830	95	9	87	29.4
ST205/75D15	6H01231	LRC	27.1	8.0	5.50	1820	50	8	87	21.1
ST205/90D15	6H01441	LRD	29.4	8.0	5.50	2600	65	12	87	28.7
ST225/75D15	6H01411	LRD	28.3	8.6	6.00	2540	65	9	87	26.0
ST225/90D16	6H01431	LRE	31.6	9.0	6.00	3520	80	12	87	41.4



CSL 16 ALL STEEL

USA TRAIL

EXTRA GRIP

BOAT, CARGO, HORSE AND LIVESTOCK, RV, TOWABLE UTILITY, AND SPECIALTY TRAILERS

CSL 16 ALL STEEL

The CSL 16 tire offers heavy duty hauling capabilities for large equipment and extremely heavy loads. Its all-steel body is essential for a load rating of up to 4,400 pounds of towing capacity. Its robust construction combined with an industrial highway tread design leads to extended service life on the highway and protects against environmental elements.

SIZE	PRODUCT CODE	LOAD RANGE	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD	RECOM'D PSI	TREAD DEPTH (32nds)	SPEED RATING	TIRE WEIGHT
ST225/75R15	6H09881^	LRF	28.3	8.7	6.00	3080	95	11	81	44.6
ST225/90R16	6H20121	LRG	31.6	8.7	6.00	3960	120	14	68	54.4
ST235/80R16	6H08101^	LRG	30.6	9.0	6.50	4080	110	10	81	56.2
ST235/85R16	6H08111^	LRG	30.9	9.5	6.50	4400	110	11	81	58.9

USA TRAIL®



The USA Trail tire is built for long-lasting wear with its bias-ply construction. With rugged grooves to channel water in wet conditions, the USA Trail tire is compliant with DOT standards and made in the USA.

SIZE	PRODUCT CODE	LOAD RANGE	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD	RECOM'D PSI	TREAD DEPTH (32nds)	SPEED RATING	TIRE WEIGHT
6.90-9	519572	LRC	22.0	7.1	4.50	1100	60	10	62	14.3

Tires in this product line will remain Carlisle branded until further notice

SURE TRAIL



Long-lasting wear with its bias-ply construction. With rugged grooves to channel water in wet conditions, the Sure Trail tire is Made in the USA.

SIZE	PRODUCT CODE	LOAD RANGE	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD	RECOM'D PSI	TREAD DEPTH (32nds)	SPEED RATING	TIRE WEIGHT
ST195/75D14	519307	LRD	24.6	7.2	5.50	1870	65	10	62	21.2

Tires in this product line will remain Carlisle branded until further notice

EXTRA GRIP



Long-lasting wear with its bias-ply construction. With rugged grooves to channel water in wet conditions, the Extra Grip tire is Made in the USA.

SIZE	PRODUCT CODE	LOAD RANGE	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD	RECOM'D PSI	TREAD DEPTH (32nds)	SPEED RATING	TIRE WEIGHT
5.70-8	519886	LRB	18.6	5.8	3.75	715	50	8.5	62	11.2

Tires in this product line will remain Carlisle branded until further notice



BOAT, CARGO, HORSE AND LIVESTOCK, RV, TOWABLE UTILITY, AND SPECIALTY TRAILERS

LPT - NEW!

The LPT features an All Steel body specifically designed for heavy-duty trailers. The solid squared shoulder enhances stability, handling and tread wear. It features an industrial tread for increased longevity and superior performance. Robust construction increases performance, strength and durability. The LPT is idea for use on cargo trailers, livestock specialty trailers Towable Utility Trailers.

SIZE	PRODUCT CODE	LOAD RANGE	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD	RECOM'D PSI	TREAD DEPTH (32nds)	SPEED RATING	TIRE WEIGHT
215/75R17.5	6H20101	LRJ	30.2	8.3	6.00	4800	123	15	62	59.7
235/75R17.5	6H20111	LRJ	31.1	9.1	6.80	6000	125	15	62	63.1

RADIAL TRAIL AT – NEW!

The Radial Trail A/T tire offers superior traction, improved rolling resistance, minimized wear and noise, heat dissipation, and enhanced scuff protection. The rim guard ensures wheel safety in adverse conditions.

SIZE	PRODUCT CODE	LOAD RANGE	DIAMETER	WIDTH	RIM WIDTH	MAX LOAD	RECOM'D PSI	TREAD DEPTH (32nds)	SPEED RATING	TIRE WEIGHT
ST205/75R15	6H22311	LRD	27.3	7.7	5.50	2150	65	13	81	N/A
ST215/75R14	6H22301	LRC	26.9	8.2	6.00	1870	50	13	81	N/A
ST225/75R15	6H22291	LRE	28.6	8.5	5.50	2830	80	13	81	N/A
ST235/75R15	6H22271	LRE	28.9	9.0	6.00	3080	80	13	81	N/A
ST235/80R16	6H22281	LRE	31.0	9.0	6.50	3420	80	13	81	N/A

Agriculture and Construction


FRONT TRACTOR STEERING



FARM SPECIALIST® F-2
TRIPLE RIB 44



FARM SPECIALIST®
F-2M QUAD RIB 44




FARM SPECIALIST® F-3
INDUSTRIAL FRONT 44


IMPLEMENT




FARM SPECIALIST® F-3
RADIAL IMPLEMENT 45



FARM SPECIALIST® F-1
HIGHWAY SERVICE 45



FSE F-1 IMPLEMENT 45



RADIAL I-1 IMPLEMENT 45



FARM SPECIALIST®
HF-1 IMPLEMENT 46



FARM SPECIALIST®
I-1 IMPLEMENT 46



TRAC CHIEF® I-3 47



FARM
SPECIALIST® TB 47

COMPACT UTILITY TRACTOR




FARM
SPECIALIST® R-1 48



TURF PRO R-3
TURF PRO PLUS R-3 48



MULTI-TRAC CS R-3 48



GROUND FORCE R-3 48



VERSATILE
TURF 49





SPECIAL APPLICATIONS



USA LOADER® 49




SKID STEER AND BACKHOE

GROUND FORCE®
600/625XT 49

TRAC CHIEF® 50



TRAC CHIEF XT 50

GROUND FORCE®
400 R-4 50GROUND FORCE®
400 ULTRA 51GROUND FORCE®
400 MX 51ULTRA GUARD®
STEEL 51

LARGE TRACTOR



FSTR 52-53



FARM SPECIALIST F-2

FARM SPECIALIST F-2M
QUAD RIB

FARM SPECIALIST F-3
INDUSTRIAL FRONT

FRONT TRACTOR APPLICATIONS

FARM SPECIALIST® F-2 TRIPLE RIB

The Farm Specialist F-2 tire is a proven tire for front steering 2-wheel drive tractor applications. Its 3 rib design is optimal for steering response in loose and cultivated soils and has added stability with its wide center and shoulder ribs. Made in the USA.

SIZE	PRODUCT CODE	TT/ TL	PLY RATING	LOAD RATING	MAX PSI	RATED LOAD	RIM WIDTH	WIDTH	DIAMETER	STATIC LOADED RADIUS	ROLLING CIRC.	TREAD DEPTH (32nd)	TIRE WEIGHT
4.00-15SL	52F230	TT	4	62A8	52	585	15.0	4.4	24.3	10.8	72.3	14	9.2
5.00-15SL	52F235	TT	4	69A8	44	715	15.0	5.1	26.0	11.6	77.4	17	13.8
6.00-16SL	52F2751^	TT	6	85A8	52	1140	16.0	6.6	28.9	13.4	89.4	20	21.0
7.5L-15SL	52F290	TT	6	93A8	44	1430	15.0	8.0	29.1	13.1	87.1	24	27.4
9.5L-15SL	52F344	TL	8	102A8	45	1870	15.0	9.9	31.5	14.1	94.0	21	44.3
11L-15SL	52F318	TL	8	106A8	44	2090	15.0	11.0	32.0	14.4	96.1	25	53.5
5.50-16SL	52F239	TT	6	82A8	56	1050	16.0	5.9	28.0	12.5	83.5	20	17.8
6.50-16SL	52F281	TT	6	88A8	48	1230	16.0	7.3	29.8	13.3	88.9	20	22.6
10.00-16SL	52F398	TL	8	110A8	44	2340	16.0	11.0	34.9	15.8	103.4	32	53.5
7.50-16SL	52F384	TL	8	99A8	34	1710	16.0	7.9	31.8	14.4	94.0	25	33.0
11.00-16SL	52F395	TL	8	110A8	40	2340	16.0	12.7	37.4	16.8	111.7	33	79.2

FARM SPECIALIST® F-2M QUAD RIB



Developed for larger horsepower tractors, the Farm Specialist F-2M is a quad ribbed powerhouse that is self-cleaning and designed for channeling water in wet conditions. Made in the USA.

SIZE	PRODUCT CODE	TT/ TL	PLY RATING	LOAD RATING	MAX PSI	RATED LOAD	RIM WIDTH	WIDTH	DIAMETER	STATIC LOADED RADIUS	ROLLING CIRC.	TREAD DEPTH (32nd)	TIRE WEIGHT
11.00-16SL	53F395	TL	8	114A8	40	2600	16.0	13.1	38.0	17.0	113.3	28	79.9
10.00-16SL	53F398	TL	8	110A8	44	2340	16.0	10.8	35.0	15.8	105.1	32	65.0

Tires in this product line will remain Carlisle branded until further notice

FARM SPECIALIST® F-3 INDUSTRIAL FRONT



Primarily used on front tractor steering applications, the Farm Specialist F-3 tire offers a rugged and heavier tread construction for resistance to chipping, cracking and rib tearing. Its tightly grooved zig-zag tread is designed for turf protection and engineered to channel water in wet terrain. Made in the USA.

SIZE	PRODUCT CODE	TT/ TL	PLY RATING	LOAD RATING	MAX PSI	RATED LOAD	RIM WIDTH	WIDTH	DIAMETER	STATIC LOADED RADIUS	ROLLING CIRC.	TREAD DEPTH (32nd)	TIRE WEIGHT
11L-16SL	565317	TL	12	116A8	64	2760	16.0	11.0	33.0	14.7	97.9	16	54.3

Tires in this product line will remain Carlisle branded until further notice

FARM SPECIALIST F-1
HIGHWAY SERVICE IMPLEMENTFARM SPECIALIST F-3
RADIAL IMPLEMENT

FSE F-1 IMPLEMENT

RADIAL I-1 IMPLEMENT

PULL BEHIND IMPLEMENT APPLICATIONS**FARM SPECIALIST® F-1 HIGHWAY SERVICE IMPLEMENT**

Used for highway service implement applications, the Farm Specialist F-1 tire is specially designed for towed vehicle applications at intermittent highway speeds. DOT approved for highway use. Made in the USA.

SIZE	PRODUCT CODE	TT/ TL	PLY RATING	LOAD RATING	MAX PSI	RATED LOAD	RIM WIDTH	WIDTH	DIAMETER	STATIC LOADED RADIUS	ROLLING CIRC.	TREAD DEPTH (32nd)	TIRE WEIGHT
10.00-15	51H361	TL	8	128J	60	3960	15.0	11.0	33.5	15.0	100.0	9	51.8

Tires in this product line will remain Carlisle branded until further notice

FARM SPECIALIST® F-3 RADIAL IMPLEMENT

With its radial construction and IF technology design, this tire is built to carry up to 20% more load at the same PSI of a standard radial implement.

SIZE	PRODUCT CODE	TT/ TL	PLY RATING	LOAD RATING	MAX PSI	RATED LOAD	RIM WIDTH	WIDTH	DIAMETER	STATIC LOADED RADIUS	ROLLING CIRC.	TREAD DEPTH (32nd)	TIRE WEIGHT
280/70R15	6A09271	TL	8	134D	64	4680	15.0	10.6	30.5	13.6	91.0	12	53.5

FSE F-1 IMPLEMENT

Used for highway service implement applications, the FSE F-1 Implement tire is specially designed for towed vehicle applications at intermittent highway speeds. DOT approved for highway use.

SIZE	PRODUCT CODE	TT/ TL	PLY RATING	LOAD RATING	MAX PSI	RATED LOAD	RIM WIDTH	WIDTH	DIAMETER	STATIC LOADED RADIUS	ROLLING CIRC.	TREAD DEPTH (32nd)	TIRE WEIGHT
9.5L-15F1	6X14433	TL	12	123J	90	3420	15.0	9.5	30.2	13.6	88.4	13	41.9
11L-15F1	6X14443	TL	12	128J	90	3960	15.0	10.6	30.8	13.9	90.9	13	44.1
12.5L-15F1	6X14453	TL	12	134J	90	4680	15.0	12.1	32.1	14.4	134.0	13	60.6

RADIAL I-1 IMPLEMENT

The new Carlisle IF radial implement tires are designed to carry 20% higher loads at the same pressure as standard metric tires. These steel belted tires will provide improved tread wear and lower soil compaction due to a larger footprint.

SIZE	PRODUCT CODE	TT/ TL	PLY RATING	LOAD RATING	MAX PSI	RATED LOAD	RIM WIDTH	WIDTH	DIAMETER	STATIC LOADED RADIUS	ROLLING CIRC.	TREAD DEPTH (32nd)	TIRE WEIGHT
IF280/70R15	6A15761	TL	N/A	134D	64	4680	15.0	10.6	30.5	13.4	89.0	11	55.0
IF240/80R15	6A15771	TL	N/A	121D	46	3200	15.0	9.7	30.1	13.3	88.0	11	50.0

Tires in this product line will remain Carlisle branded until further notice



FARM SPECIALIST HF-1
IMPLEMENT

FARM SPECIALIST I-1
IMPLEMENT

FARM SPECIALIST® HF-1 IMPLEMENT

The Farm Specialist HF-1 implement tire is designed for higher performance applications with heavier loads and when high flotation is needed. Made in the USA.

SIZE	PRODUCT CODE	TT/ TL	PLY RATING	LOAD RATING	MAX PSI	RATED LOAD	RIM WIDTH	WIDTH	DIAMETER	STATIC LOADED RADIUS	ROLLING CIRC.	TREAD DEPTH (32nd)	TIRE WEIGHT
25x7.50-15	51F378	TL	6	88B	45	1230	15.0	7.5	25.2	11.0	73.3	9	22.2

FARM SPECIALIST® I-1 IMPLEMENT



With its wide rib tread design, the Farm Specialist I-1 tire is aimed for flotation on farm implements for excellent lateral stability and rolling resistance.

SIZE	PRODUCT CODE	TT/ TL	PLY RATING	LOAD RATING	MAX PSI	RATED LOAD	RIM WIDTH	WIDTH	DIAMETER	STATIC LOADED RADIUS	ROLLING CIRC.	TREAD DEPTH (32nd)	TIRE WEIGHT
26x12.00-12	510363	TL	N/A	N/A	52	3110	12.0	11.7	25.5	11.4	75.7	12	28.9
11L-14SL	51F391	TL	8	112B	36	2470	14.0	10.6	29.6	13.2	87.7	11	32.5
5.00-15SL	51F235	TT	4	N/A	36	950	15.0	5.4	25.2	11.2	74.7	6	12.0
5.90-15SL	51F252^	TT	4	85B	36	1140	15.0	6.3	26.3	11.7	77.9	7	13.5
9.5L-15	6X17713	TL	8	112B	44	2470	15.0	9.1	29.8	13.2	88.1	9	28.0
9.5L-15	6X17283	TL	12	121B	64	3200	15.0	9.1	29.8	13.3	88.3	9	31.0
10.00-15SL	51F385	TL	8	121B	40	3200	15.0	11.4	33.6	15.0	98.6	9	45.6
11L-15SL	6X17723	TL	8	113B	36	2540	15.0	11.1	30.8	13.6	90.7	9	32.7
11L-15SL	6X17263	TL	12	121B	52	3200	15.0	11.1	30.8	13.7	91.0	9	40.0
12.5L-15SL	6X17273	TL	12	127B	52	3860	15.0	12.2	32.8	14.6	97.3	12	54.0
14L-16.1SL	6A0340	TL	14	138B	52	5200	16.1	14.2	37.1	16.3	108.5	13	77.7
16.5L-16.10SL	51F350	TL	10	138B	36	5200	16.1	17.1	40.8	17.9	117.5	14	101.0
18L-16.1SL*	510130	TL	10	130B	32	4180	16.1	17.0	32.5	14.3	95.2	14	71.8
32x15.5-16.5SL	6A0086^	TL	14	142B	90	5840	16.5	15.6	32.2	14.6	97.4	18	87.3

[^]Tires will remain Carlisle branded until further notice

* 7 Rib Design.



TRAC CHIEF I-3

FARM SPECIALIST TB

FRONT AND REAR TRACTOR, COMPACT TRACTOR, AND BACKHOE LOADER APPLICATIONS

TRAC CHIEF® I-3

Designed for traction on implements and backhoes, the Trac-Chief I-3 tire delivers diverse capabilities of aggressive and durable traction on soft surfaces while still providing a smooth ride. It's directional tread design and high load capacity brings stability and easy steering for front wheel tractor applications and backhoe loaders. Made in the USA.

SIZE	PRODUCT CODE	TT/ TL	PLY RATING	LOAD RATING	MAX PSI	RATED LOAD	RIM WIDTH	WIDTH	DIAMETER	STATIC LOADED RADIUS	ROLLING CIRC.	TREAD DEPTH (32nd)	TIRE WEIGHT
12.4-16	570122^	TL	6	110A8	30	2340	16.0	13.3	37.4	17.3	111.2	30	81.8
10.5/80-18	570120	TL	10	N/A	54	3840	18.0	10.8	35.6	16.2	105.5	29	70.2
12.5/80-18	570121	TL	12	139A8	55	5360	18.0	12.5	38.5	17.5	114.6	31	95.7

FARM SPECIALIST® TB

The Farm Specialist TB is used primarily on compact utility tractors. The multi-angle, curved lug bars provide improved traction and self-cleaning properties. It is an all-purpose tire that offers aggressive performance and superior ride comfort.

SIZE	PRODUCT CODE	TT/ TL	PLY RATING	LOAD RATING	MAX PSI	RATED LOAD	RIM WIDTH	WIDTH	DIAMETER	STATIC LOADED RADIUS	ROLLING CIRC.	TREAD DEPTH (32nd)	TIRE WEIGHT
6-12	6X20843	TL	6	97A6	40	1610	12.0	6.1	22.7	10.3	69.0	24.6	18.0
7-14	6X20833	TL	6	80A8	36	990	14.0	7.2	27.2	12.4	80.0	27.8	27.0
8.3-24	6X18553^	TL	8	105A6/101A8	45	2040	24.0	8.3	39.2	18.5	115.0	26.2	60.0
9.5-24	6X18183	TL	8	112A6/108A8	41	2470	24.0	9.1	41.6	19.5	122.0	28.5	57.3
11.2-24	6X17353^	TL	8	116A6/112A8	35	2760	24.0	11.2	43.5	20.3	128.0	32	71.6
11.2-28	6X18343^	TL	8	118A6/114A8	35	2910	28.0	11.2	47.4	22.2	139.0	31.8	86.0
12.4-38	6X12423^	TT	8	127A6/123A8	33	6600	38.0	12.4	60.0	28.0	177.0	N/A	138.0
12.4-24	6X17363	TL	8	121A6/117A8	33	3200	24.0	12.4	45.7	21.2	134.0	34	89.3
12.4-28	6X18243^	TL	8	123A6/120A8	33	3420	28.0	12.4	49.6	23.2	146.0	27.4	107.0
13.6-28	6X19283^	TL	8	125A6/121A8	29	3640	28.0	13.6	51.6	24.0	152.0	29	125.0
13.6-38	6X19313	TL	8	131A6/127A8	29	4300	38.0	13.6	61.6	29.1	181.0	29	154.0
14.9-28	6X18263^	TL	8	130A6/126A8	26	4180	28.0	14.9	53.7	25.0	158.0	29	153.0
14.9-24	6X17373^	TL	8	128A6/124A8	26	3960	24.0	14.9	49.8	23.0	146.0	29	125.2
15.5-38	6X19353^	TL	8	133A6/129A8	26	4540	38.0	15.5	62.4	29.4	184.0	30	180.0
16.9-28	6X19293	TL	10	139A6/135A8	29	5360	28.0	16.9	56.5	25.8	170.0	38	172.0
16.9-34	6X19303^	TL	8	138A6/134A8	25	5200	34.0	16.9	62.4	28.9	183.0	38	200.0
16.9-38	6X19343	TL	8	141A6/136A8	25	5680	38.0	16.9	66.3	31.0	195.0	38	225.0
16.9-28	6X18583^	TL	8	135A6/131A8	25	4800	28.0	16.9	56.5	25.8	170.0	N/A	N/A
16.9-30	6X18403	TL	8	137A6/132A8	25	5080	30.0	16.9	58.5	27.0	172.0	38.1	181.0
18.4-26	6X19273	TL	10	142A6/138A8	26	5840	26.0	18.4	57.1	26.1	168.0	38.5	194.0
18.4-34	6X19323	TL	10	146A6/143A8	26	6600	34.0	18.4	65.0	30.0	191.0	38.5	229.0
18.4-38	6X19333	TL	10	149A6/145A8	26	7150	38.0	18.4	68.9	32.0	203.0	36	251.0
18.4-30	6X18283^	TL	10	145A6/141A8	26	6400	30.0	18.4	60.8	28.1	179.0	N/A	209.0



FARM SPECIALIST® R-1

TURF PRO R-3

MULTI-TRAC CS R-3



FARM SPECIALIST® R-1

Used primarily on compact utility tractors, the Farm Specialist R-1 tire features an overlapping center tread lug that performs in both wet and dry conditions. The all-purpose tire features a unique multi-angle long bar tread for aggressive performance, excellent traction and lateral stability. Made in the USA.

SIZE	PRODUCT CODE	TT/ TL	PLY RATING	LOAD RATING	MAX PSI	RATED LOAD	RIM WIDTH	WIDTH	DIAMETER	STATIC LOADED RADIUS	ROLLING CIRC.	TREAD DEPTH (32nd)	TIRE WEIGHT
6-12	570030	TL	6	N/A	40	735	12.0	6.1	23.0	10.3	68.9	22	18.1
7-14	570000	TL	6	80A8	36	990	14.0	7.4	27.1	12.4	80.5	32	26.6
8.3-24	570004^	TL	6	97A8	34	1610	24.0	8.3	39.1	18.1	117.2	38	81.4
9.5-24	570005	TL	6	102A8	30	1870	24.0	9.5	41.3	19.0	123.2	41	82.2

[^]Tires will remain Carlisle branded until further notice

TURF PRO® R-3/TURF PRO® PLUS R-3



Designed for mowing and turf applications, this series is engineered with shallow non-skid depth with isolated tread elements that create minimal ground disturbance for a turf-friendly result. Made in the USA.

SIZE	PRODUCT CODE	TT/ TL	PLY RATING	LOAD RATING	MAX PSI	RATED LOAD	RIM WIDTH	WIDTH	DIAMETER	STATIC LOADED RADIUS	ROLLING CIRC.	TREAD DEPTH (32nd)	TIRE WEIGHT
9.5-24	570084	TL	6	102A8	30	1870	24.0	9.5	40.3	18.6	120.5	16	57.8
11.2-24	570085	TL	6	106A8	26	2090	24.0	11.2	42.4	19.5	126.3	20	81.9
13.6-16	570080	TL	4	96A8	14	1570	16.0	15.8	38.2	17.2	112.8	24	81.8
31x15.5-15	560589	TL	8	116B	45	2760	15.0	14.2	30.3	13.7	90.4	16	58.5

Tires in this product line will remain Carlisle branded until further notice

MULTI-TRAC CS R-3



With its squared lugs and wide base for stability, the Multi-Trac CS R-3 is excellent for minimal ground disturbance for turf and mowing applications. Made in the USA.

SIZE	PRODUCT CODE	TT/ TL	PLY RATING	LOAD RATING	MAX PSI	RATED LOAD	RIM WIDTH	WIDTH	DIAMETER	STATIC LOADED RADIUS	ROLLING CIRC.	TREAD DEPTH (32nd)	TIRE WEIGHT
41x14.00-20	570083	TL	4	120B	26	3080	20.0	14.8	42.0	19.0	127.0	22	103.5
44x18.00-20	6A0375	TL	6	131B	30	4300	20.0	18.5	45.5	20.7	134.6	25	136.0

Tires in this product line will remain Carlisle branded until further notice

GROUND FORCE R-3



The Ground Force R-3 Diamond Tread tire features a high flotation and turf-friendly design. It is optimal for tractor applications where low ground pressure is required such as golf courses or sandy soil.

SIZE	PRODUCT CODE	TT/ TL	PLY RATING	LOAD RATING	MAX PSI	RATED LOAD	RIM WIDTH	WIDTH	DIAMETER	STATIC LOADED RADIUS	ROLLING CIRC.	TREAD DEPTH (32nd)	TIRE WEIGHT
23.1-26	6X17433	TL	16	159A6	33	9650	26.0	23.1	61.4	27.0	179.0	34	317.0

Tires in this product line will remain Carlisle branded until further notice



VERSA TURF

USA LOADER

GROUND FORCE 600

GENERAL DUTY SKID STEER, COMPACT TRACTOR, AND BACKHOE LOADER APPLICATIONS

VERSA TURF

Designed with a radial construction for improved flotation, the Versa Turf reduces turf disturbance while maximizing traction with its 60% deeper tread depth compared to a standard R-3 tire design. Engineered with superior mud-shedding performance by featuring self-cleaning breaker bars in the tread and rounded shoulders.

SIZE	PRODUCT CODE	TT/ TL	PLY RATING	LOAD RATING	MAX PSI	RATED LOAD	RIM WIDTH	WIDTH	DIAMETER	STATIC LOADED RADIUS	ROLLING CIRC.	TREAD DEPTH (32nd)	TIRE WEIGHT
14-17.5	6X19763	TL	6	121A8	30	3200	17.5	13.2	36.3	16.3	108.0	25	78.0
17.5L-24	6X19743	TL	6	132A8	20	4400	24.0	17.7	48.8	21.8	145.0	32	149.0
25x8.50R14	6L19791	TL	6	93A6	50	1430	14.0	8.3	25.0	11.6	74.5	17	28.0
29.5x10R16.5	6L19831	TL	6	110A6	45	2340	16.5	10.4	29.5	12.9	88.0	24	51.0
43x16-20	6A1977	TL	6	129A8	30	4080	20.0	16.4	43.4	19.6	129.0	27	117.0
12R16.5	6L13541	TL	6	116A8	40	2760	16.5	12.2	32.6	14.9	97.6	29	61.8

USA LOADER®



Engineered with lateral grooves and a "Boot Heel Lug" tread configuration, the USA Loader brings traction and stability on specialty applications where safety and stability are critical. Made in the USA.

SIZE	PRODUCT CODE	TT/ TL	PLY RATING	LOAD RATING	MAX PSI	RATED LOAD	RIM WIDTH	WIDTH	DIAMETER	STATIC LOADED RADIUS	ROLLING CIRC.	TREAD DEPTH (32nd)	TIRE WEIGHT
305/70D16.5	6A0170	TL	10	N/A	65	5600	16.5	12.6	32.9	14.8	98.5	27	77.2

Tires in this product line will remain Carlisle branded until further notice

GROUND FORCE® 600/625 XT



Ground Force 600 Series is built for backhoe loaders in all weather conditions. With its rugged, heavy-duty construction, it withstands rigorous operating site conditions.

SIZE	PRODUCT CODE	TT/ TL	PLY RATING	LOAD RATING	MAX PSI	RATED LOAD	RIM WIDTH	WIDTH	DIAMETER	STATIC LOADED RADIUS	ROLLING CIRC.	TREAD DEPTH (32nd)	TIRE WEIGHT
16.9-24*	6X14693	TL	12	149A8	38	7150	24.0	16.9	51.6	23.7	153.0	38	183.0
17.5L-24	6X14312	TL	12	148A8	39	6950	24.0	17.5	50.0	22.4	145.0	33	172.6
19.5L-24*	6X14793	TL	12	151A8	33	7600	24.0	19.0	51.4	23.1	155.0	38	227.0
21L-24	6X17253*	TL	14	157A8	35	9100	24.0	21.0	54.2	24.0	157.0	37	249.0

*Tires will remain Carlisle branded until further notice

* 625 XT tread pattern



TRAC CHIEF®



Applied on general duty skid steer and compact tractor applications, the Trac Chief is engineered with a flat profile for increased stability, rugged tread compounds and a built-in rim gauge to protect its bead area from hazards and debris. Made in the USA.

SIZE	PRODUCT CODE	TT/ TL	PLY RATING	LOAD RATING	MAX PSI	RATED LOAD	RIM WIDTH	WIDTH	DIAMETER	STATIC LOADED RADIUS	ROLLING CIRC.	TREAD DEPTH (32nd)	TIRE WEIGHT
5.70-12	51S3C2	TL	4	93A2	60	1430	12.0	5.5	22.4	10.3	68.9	17	15.9
20x8.00-10	560483	TL	4	77A3	24	910	10.0	8.2	19.3	8.8	57.1	16	17.6
23x8.50-14	51S388	TL	4	94A2	35	1480	14.0	8.0	23.0	10.4	69.2	17	22.6
27x12.5-15	560484^	TL	4	N/A	20	2030	15.0	12.0	28.0	12.8	83.1	19	41.0
28x8.50-15	570139	TL	6	102A2	45	1870	15.0	8.8	28.3	12.5	82.1	16	31.9

[^]Tires will remain Carlisle branded until further notice

TRAC CHIEF® XT (CONTAINER ONLY)



The Trac Chief® XT is for use on skid steer, backhoe, compact tractor, aerial work platform lifts and three wheel rough terrain forklifts in general purpose applications. It features a rugged tread compound, nylon cord construction and flat profile for increased traction, stability and tread life. Other features include a rim guard that protects the tire bead against damage from foreign material/debris

SIZE	PRODUCT CODE	TT/ TL	PLY RATING	LOAD RATING	MAX PSI	RATED LOAD	RIM WIDTH	WIDTH	DIAMETER	STATIC LOADED RADIUS	ROLLING CIRC.	TREAD DEPTH (32nd)	TIRE WEIGHT
10-16.5	5701401	TL	10	134A2	75	4680	16.5	10.8	30.7	13.9	93.0	21	51.6
12-16.5	5701411	TL	12	N/A	80	6320	16.5	12.8	32.8	14.9	99.0	23	69.0

Tires in this product line will remain Carlisle branded until further notice

This product line is available by container only

GROUND FORCE® 400 R-4

Ground Force 400 R-4 features a robust sidewall design and tread compound ideal for general duty skid steer applications.

SIZE	PRODUCT CODE	TT/ TL	PLY RATING	LOAD RATING	MAX PSI	RATED LOAD	RIM WIDTH	WIDTH	DIAMETER	STATIC LOADED RADIUS	ROLLING CIRC.	TREAD DEPTH (32nd)	TIRE WEIGHT
18x8.50-10	6X17763	TL	4	74A2	22	825	10.0	8.1	18.6	8.3	55.5	16	14.4
23x8.50-12	6X17803	TL	6	101A2	50	1820	12.0	8.2	22.8	10.5	69.7	14	27.0
25x8.50-14	6X17773	TL	6	107A2	50	2150	14.0	8.3	25.8	11.8	78.6	17	30.0
27x8.50-15	6X17793	TL	6	111A2	45	2400	15.0	8.4	27.0	12.0	80.0	17	34.6
27x10.50-15	6X17783	TL	6	114A2	45	2600	15.0	10.4	27.4	12.4	82.9	17	36.6
10-16.5	6X17213	TL	10	134A2	75	4680	16.5	10.4	31.4	14.4	94.0	21	50.0
12-16.5	6X17243	TL	12	N/A	80	6320	16.5	12.0	32.7	14.8	99.0	25	71.0
14-17.5	6X17743	TL	14	155A2	80	8550	17.5	13.6	36.9	16.3	108.7	25	85.0
15-19.5	6X17753	TL	14	160A2	70	9900	19.5	15.3	40.5	18.2	118.3	26	119.0



GROUND FORCE 400 ULTRA

GROUND FORCE 400 MX

ULTRA GUARD STEEL

SEVERE DUTY SKID STEER APPLICATIONS

GROUND FORCE® 400 ULTRA

The Ground Force® 400 Ultra is a severe service skid steer tire. Its tread depth is 70% deeper than other premium skid steer tires and yields a 14% longer service life. With a thick sidewall buff bar for extra abrasion protection, the Ground Force® 400 Ultra is proven to provide absolute durability. The Ground Force® 400 Ultra is a substitute for Ultra Guard.

SIZE	PRODUCT CODE	TT/ TL	PLY RATING	LOAD RATING	MAX PSI	RATED LOAD	RIM WIDTH	WIDTH	DIAMETER	STATIC LOADED RADIUS	ROLLING CIRC.	TREAD DEPTH (32nd)	TIRE WEIGHT
10-16.5	6X17813	TL	10	134A2	75	4680	16.5	10.4	30.6	13.9	92.3	44	79.7
12-16.5	6X17823	TL	12	A2	80	6320	16.5	11.8	33.3	15.0	100.0	44	102.0

GROUND FORCE® 400 MX


The Ground Force 400 MX is a severe duty multi-surface skid steer tire. It has a reinforced carcass for increased load capacity, best in class tread depth, and an abrasion, cut, and puncture resistant tread compound. The non-directional tread pattern offers superior performance on both hard and soft surfaces.

SIZE	PRODUCT CODE	TT/ TL	PLY RATING	LOAD RATING	MAX PSI	RATED LOAD	RIM WIDTH	WIDTH	DIAMETER	STATIC LOADED RADIUS	ROLLING CIRC.	TREAD DEPTH (32nd)	TIRE WEIGHT
10-16.5	6X17063	TL	10	134A2	75	4680	16.5	10.2	32.0	14.5	96.0	47	93.2
12-16.5	6X17073	TL	14	147A2	90	6800	16.5	12.2	33.8	15.7	104.0	47	114.0

ULTRA GUARD STEEL - NEW!

Radial construction allows for greater load carrying capacity at lower inflation pressures, while increased tire-to-surface contact enhances traction compared to bias tires. The steel-belted construction absorbs shocks and jolts, providing greater puncture resistance..

SIZE	PRODUCT CODE	TT/ TL	PLY RATING	LOAD RATING	MAX PSI	RATED LOAD	RIM WIDTH	WIDTH	DIAMETER	STATIC LOADED RADIUS	ROLLING CIRC.	TREAD DEPTH (32nd)	TIRE WEIGHT
10R16.5	6A14871	TL	N/A	129A6	73	4080	16.5	10.6	30.5	13.9	92.0	26	66.0
12R16.5	6A14881	TL	N/A	137A6	73	5080	16.5	12.4	32.8	14.7	98.0	33	76.0

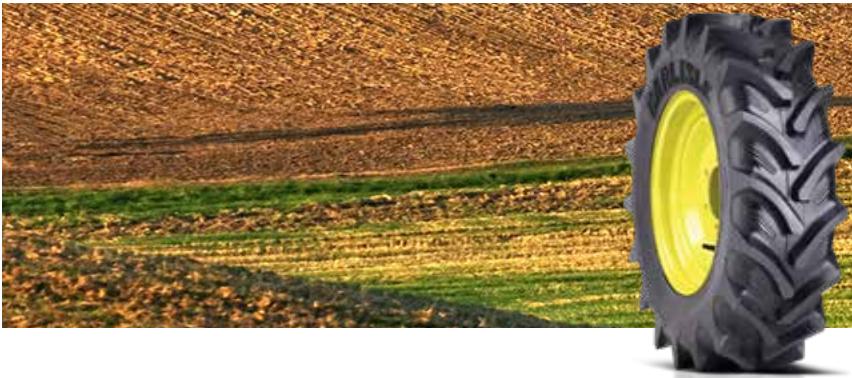

FSTR

HEAVY DUTY, LARGE TRACTOR APPLICATIONS

FSTR (CONTAINER ONLY)

CARLISLE

The FSTR is a line of R1-W radial tires with rim diameters ranging from a 16" to 48". The radial construction of these tires will deliver the traction and smooth ride for farmers to increase their efficiency in the field.

PRIMARY LOAD RATING										
SIZE	PRODUCT CODE	LOAD INDEX	RATED LOAD	PSI	OVERALL WIDTH	OVERALL DIAMETER	TREAD DEPTH (32nd)	ROLLING CIRCUMFERENCE	STATIC LOAD RADIUS	TIRE WEIGHT
210/95R32	6A07292	114	2600	34	8.46	47.83	39	144	21.6	419.3
210/95R44	6A07322	120	3080	34	8.46	59.84	40	181	27.1	130.4
230/95R32	6A07302	128	3960	58	9.06	49.41	40	149	22.3	114.3
230/95R44	6A07332	132	4400	58	9.06	61.42	42	186	27.8	143.5
230/95R48	6A07352	136	4940	58	9.06	65.35	45	198	29.6	159.3
240/70R16	6A06802	104	1980	34	9.7	29.3	35	88	13.2	47.2
260/70R16	6A06812	109	2270	34	10.24	30.3	37	91	13.6	51.8
270/95R32	6A07312	136	4940	58	10.83	52.36	49	158	23.6	143.1
280/70R18	6A06832	114	2600	34	11.1	33.4	40	100	15	72.0
280/70R16	6A06822	112	2470	34	11.1	31.4	40	94	14	64.7
280/70R20	6A06842	116	2760	34	11.1	35.43	43	106	15.9	81.7
280/85R20	6A07052	112	2470	23	11.1	38.74	43	116	17.4	90.7
280/85R24	6A05662	115	2680	23	11.1	42	49	128	19.2	103.2
280/85R28	6A07122	118	2910	23	11.1	46.73	49	140	21.1	118.6
300/70R20	6A06852	120	3080	34	11.61	37.48	44	112	16.8	93.8
300/95R46	6A07342	148	6950	58	11.8	68.5	50	207	31	208.8
320/70R20	6A06862	113	2540	23	12.56	38.66	43	116	17.3	97.7
320/70R24	6A06882	116	2760	23	12.56	43.11	47	129	19.4	116.4
320/85R20	6A07062	119	3000	23	12.56	41.42	44	124	18.5	109.5
320/85R24	6A07082	122	3300	23	12.56	45.43	49	136	20.4	129.3
320/85R28	6A07132	124	3520	23	12.6	49.41	52	148	22.2	138.4
320/90R46	6A08362	146	6600	46	12.6	68.9	52	206.7	32.3	229.0
340/85R28	6A07142	127	3860	23	13.5	50.75	53	152	22.8	158.7
340/85R36	6A07222	132	4400	23	13.5	58.86	54	177	26.6	195.4
340/85R38	6A07232	133	4540	23	13.5	60.83	54	183	27.5	199.0
360/70R20	6A06872	129	4080	34	14.06	41.02	50	122	18.3	125.2
360/70R24	6A06892	122	3300	23	14.06	45.35	52	136	20.3	138.5
360/70R28	6A06932	125	3640	23	14.06	49.41	53	148	22.2	155.0
380/70R24	6A06902	125	3640	23	14.96	46.85	55	140	21	155.5

Tires in this product line will remain Carlisle branded until further notice
This product line is available by container only

Continues on Next Page



FSTR CONTINUED (CONTAINER ONLY)

PRIMARY LOAD RATING										
SIZE	PRODUCT CODE	LOAD INDEX	RATED LOAD	PSI	OVERALL WIDTH	OVERALL DIAMETER	TREAD DEPTH (32nd)	ROLLING CIRCUMFERENCE	STATIC LOAD RADIUS	TIRE WEIGHT
380/70R28	6A06942	127	3860	23	14.96	50.91	55	153	22.9	168.0
380/85R30	6A07172	135	4800	23	15	55.4	55	166	24.9	190.7
380/85R38	6A07242	139	5360	23	14.96	63.43	55	191	28.6	234.5
420/70R24	6A06912	130	4180	23	16.46	49.13	54	147	22	181.2
420/70R28	6A06952	133	4540	23	16.46	53.19	54	159	23.9	201.7
420/70R30	6A06972	134	4680	23	16.46	55.12	55	165	24.8	215.2
420/85R24	6A07112	137	5080	23	16.46	52.13	54	155	23.3	213.8
420/85R28	6A05712	139	5360	23	16.5	56.1	58	168	25.1	221.8
420/85R38	6A07252	144	6150	23	16.5	66.1	60	199	29.8	290.1
440/65R24	6A06732	128	3960	35	17.5	46.65	50	139	20.9	177.2
440/65R28	6A06752	131	4300	35	17.5	50.6	52	152	22.8	199.0
460/70R24	6A06922	152	7850	46	18.11	49.61	47	148	22.2	203.9
480/65R24	6A06742	133	4540	35	18.9	48.6	52	145	21.8	202.9
480/65R28	6A06762	142	5840	35	18.9	52.6	52	158	23.7	225.0
480/70R26	6A08322	139	5360	23	18.9	54.3	57	163	24.5	236.0
480/70R28	6A06962	140	5520	23	18.9	56.1	58	168	25.1	251.4
480/70R30	6A06982	141	5680	23	18.9	58.3	55	174	26.2	278.7
480/70R34	6A06992	143	6000	23	18.9	62.2	59	187	28	311.8
480/70R38	6A07002	145	6400	23	18.9	66.34	62	199	29.9	337.1
480/80R42	6A06562	151	7600	23	19.1	72.6	65	218	33.4	394.0
480/80R46	6A08332	164	11000	46	19.1	76.6	66	229.7	35.4	422.0
520/70R38	6A07012	150	7400	23	20.3	68.9	66	207	31	391.3
520/85R38	6A05792	155	8550	23	20.3	72.8	69	218	32.7	419.3
520/85R42	6A07282	157	9100	23	20.31	76.97	71	231	34.6	478.2
540/65R28	6A06772	149	7150	35	21.7	55.9	57	167	25.1	284.0
580/70R38	6A07022	155	8550	23	22.8	72.1	69	216	32.4	458.0
600/65R38	6A06782	159	9650	35	23.4	68.9	58	207	31	425.8
600/70R30	6A08132	158	9350	34	22.2	63.2	67	188	28.3	425.3
620/75R30	6A07032	163	10700	35	24.8	66.7	73	198	29.8	535.5
650/65R38	6A06792	163	10700	34	25.6	71.65	72	215	32.2	561.0
650/75R32	6A07042	172	13900	46	25.6	70.7	74	210	74	588.2
710/70R38	6A08142	171	13600	34	27.9	77.1	72	231	34.6	672.7
750/65R26	6A08342	166	11700	34	29.7	64.6	63	193.7	28.6	544.0


Tires in this product line will remain Carlisle branded until further notice
This product line is available by container only

Industrial

ALL PURPOSE



INDUSTRIAL
DEEP TRACTION 56



ROAD
ROLLER 56



INDUSTRIAL
ALL PURPOSE 56



PREMIUM
WIDE TRAC 57



GROUND FORCE®
ULTRA RIB GSE 57



GROUND FORCE®
300 G-2 58



GROUND FORCE®
LFT 58



GROUND FORCE®
500 59





INDUSTRIAL DEEP TRACTION

ROAD ROLLER

INDUSTRIAL ALL PURPOSE

MATERIAL HANDLING, COMPACTION AND ROAD PAVING EQUIPMENT

INDUSTRIAL DEEP TRACTION

CARLISLE

With its flat tread and reinforced beads, the Industrial Deep Traction tire is an essential standard duty tire that delivers stability and long lasting performance.

SIZE	PRODUCT CODE	PLY RATING	DIAMETER	WIDTH	RIM WIDTH	MAX CAPACITY @ 10 MPH	MAX PSI	TREAD DEPTH (32nds)	TIRE WEIGHT
5.70/5.00-8 (TT)	60126	8	18.2	5.5	3.00	1930	120	9	11.9
6.90/6.00-9 (TT)	60101	10	21.9	6.9	4.00	3715	125	19	20.3
6.50-10 (TT)	60105	10	23.4	7.4	5.00	4225	115	20	25.4
7.00-12 (TT)	60102	12	27.4	7.8	5.00	5995	125	21	36.8
8.25-15 (TT)	60104	12	33.6	9.8	6.50	8680	105	23	59.4
29x8.00-15 (TT)	60103	12	29.2	7.5	5.50	2600*	125	25	47.9

Tires in this product line will remain Carlisle branded until further notice

Flap is included for these tube type (TT) tires. Unless otherwise noted, load limits listed are for the Load Wheel on Counter balanced Lift Trucks. Tire load limits will be lower if used on continuous service Industrial Vehicles.

* Max load @ 25 MPH

ROAD ROLLER

CARLISLE

The Road Roller tire offers a smooth and steady tread for a consistent and leveled ride. With superior heat resistant nylon fabric belts, this tire supports heavy-duty handling with effortless execution.

SIZE	PRODUCT CODE	PLY RATING	DIAMETER	WIDTH	RIM WIDTH	MAX CAPACITY @ 10 MPH	MAX PSI	TIRE WEIGHT
7.50-15NHS (TT)*	60127	12	30.9	8.6	6.00	5860	110	43.5
7.50-15NHS (TT)	60128	14	30.9	8.6	6.00	6300	125	48.1
8.5/90-15K (TL)	60130	6	30.9	8.6	6.00	3900	50	46.0

Tires in this product line will remain Carlisle branded until further notice

* Use 5 degree flat base rim. Flap is included for the tube type (TT) tires.

INDUSTRIAL ALL PURPOSE

CARLISLE

Designed with two different rib patterns throughout the tread, the Industrial All Purpose tire presents a multi-purpose service of both traction and support with optimized weight distribution for stability with heavy equipment.

SIZE	PRODUCT CODE	PLY RATING	DIAMETER	WIDTH	RIM WIDTH	MAX CAPACITY @ 10 MPH	MAX PSI	TREAD DEPTH (32nds)	TIRE WEIGHT
7.50-10 (TT)	60100	E	25.3	7.6	5.50	1975*	90	12	24.4
7.50-10 (TT)	60129	10	25.1	8.2	6.00	3050	100	12	25.2
6.90-9 (TT)	60106	10	21.8	7.0	4.50	2230	125	11	15.9
6.90-9 (TT)	60107	6	21.5	7.0	4.50	1630	75	11	14.1

Tires in this product line will remain Carlisle branded until further notice

Flap is included for these tube type (TT) tire.

* Max load @ 62 MPH



PREMIUM WIDE TRAC

GROUND FORCE ULTRA RIB GSE

MATERIAL HANDLING, AND GROUND SUPPORT EQUIPMENT

PREMIUM WIDE TRAC



The Premium Wide Trac tire offers superior level design with an extra heavy-duty sidewall for material handling applications. Its durable construction resists abrasions in sever conditions to maximize efficiency.

SIZE	PRODUCT CODE	PLY RATING	DIAMETER	WIDTH	RIM WIDTH	MAX CAPACITY @ 10 MPH	MAX PSI	TREAD DEPTH (32nds)	TIRE WEIGHT
5.70/5.00-8 (TT)	60118	8	18.5	5.5	3.00	1930	120	17	15.0
5.70/5.00-8 (TT)	60122	10	18.5	5.5	3.00	2340	150	17	15.5
6.90/6.00-9 (TT)	60110	10	22.2	6.0	4.00	3715	125	32	28.6
6.50-10 (TT)	60116	10	23.8	7.1	5.00	4225	115	32	37.8
7.00-12 (TT)	60111	12	27.3	7.5	5.00	5995	125	32	51.5
8.25-15 (TT)	60121	14	33.6	9.8	6.50	9385	120	24	85.4
28x9.00-15 (TT)	60119	12	27.3	8.8	7.00	6880	120	18	52.7
28x9.00-15 (TT)	60120	14	27.3	8.9	7.00	7530	140	18	53.5
2.50-15 (TT)	60123	18	29.1	9.1	7.50	10100	150	24	70.4
3.00-15 (TT)	60124	20	32.7	11.3	8.00	14500	135	26	120.0
7.50-16 (TT)	60125	12	32.3	8.5	6.00	8000	115	22	57.1

Tires in this product line will remain Carlisle branded until further notice

Unless otherwise noted, load limits listed are for the Load Wheel on Counterbalanced Lift Trucks.

Tire load limits will be lower if used on continuous service Industrial Vehicles.

Flap is included for these tube type (TT) tires.



GROUND FORCE® ULTRA RIB GSE

Combined with a sturdy rib tread pattern and premium tread compounds, the Ground Force Ultra Rib GSE tire is specially designed for optimal performance on ground support equipment.

SIZE	PRODUCT CODE	PLY RATING	DIAMETER	WIDTH	RIM WIDTH	MAX CAPACITY @ 10 MPH	MAX PSI	TREAD DEPTH (32nds)	TIRE WEIGHT
9.00-10NHS (TT)	60108	10	27.2	9.7	6.00	3350	85	9	34.5
6.50-10NHS (TT)	60109	10	23.2	7.1	5.00	2535	115	24	28.6
6.90-6.00-9NHS (TT)	60131	10	21.6	6.8	4.00	2200	125	24	26.0
5.70-8NHS (TT)	60132	8	18.4	5.9	3.75	1470	120	11	12.8
4.80-8NHS (TT)	60133	8	16.6	5.2	3.75	1160	145	11	10.7

Tires in this product line will remain Carlisle branded until further notice

Flap is included for the Ground Force Ultra Rib GSE Tube Type (TT) tires.



GROUND FORCE 300 G-2

GROUND FORCE LFT

MOTOR GRADER AND BOOM LIFT EQUIPMENT

GROUND FORCE® 300 G-2

The Ground Force 300 G-2 is a motor grader tire designed for stability. With its cut-resistant tread compound and self-cleaning tread pattern, it will deliver good traction in all weather conditions.

SIZE	PRODUCT CODE	PLY RATING	DIAMETER	WIDTH	RIM WIDTH	MAX CAPACITY @ 25 MPH	MAX PSI	TIRE WEIGHT	TREAD DEPTH (32nds)
13.00-24	6X14213	14	50.3	13.1	8.00	6600	51	30	156.5
14.00-24	6X14223	14	53.1	14.3	8.00	7600	48	34	168.6

GROUND FORCE® LFT

Ground Force LFT is a low profile tire designed for boom lifts. Reinforced shoulders and a wide center tread bar provide superior stability and traction on uneven terrain.

SIZE	PRODUCT CODE	PLY RATING	DIAMETER	WIDTH	RIM WIDTH	MAX CAPACITY @ 10 MPH	MAX PSI	TIRE WEIGHT	TREAD DEPTH (32nds)
355/55D625 (TL)	6X16591	14	36.9	14.2	11.75	7600	75	9	123.0
18-625 (TL)	6X16521	16	41.2	17.5	15.00	15200*	100	10	174.0

* Max load @ 5 MPH



ELECTRIC OR SLAB SCISSOR LIFT EQUIPMENT

GROUND FORCE® 500

CARLISLE

Ground Force 500 scissor lift line offers replacement parts for major OEMs including Genie, JLG, Skyjack, and Haulotte. Designed for lateral stability, these solid non-marking tire assemblies are ideal for electric or slab scissor lifts.

PRODUCT CODE	OEM & PART NO.	SIZE	HUB TYPE
XA4A001	GENIE 57998	10x3	Tapered
XA4A002	GENIE 105122	12x4.5	Tapered
XA4A003	GENIE 105454	15x5	Tapered
XA4A004	GENIE 94908	22x7	8 hole
XA4A005	GENIE 94909	22x7	9 hole
XA4A008	JLG 2915012	323x100	5 hole
XA4A009	JLG 2915013	406x125	5 hole
XA4A010	JLG 4520177	14x4.5	5 hole
XA4A011	JLG 4520176	16x5	5 hole
XA4A013	SKYJACK 158436 F SKYJACK 158438 F	12x4	5 hole
XA4A014	SKYJACK 158437 R SKYJACK 158439 R	12x4	5 hole
XA4A019	SKYJACK 125785 F SKYJACK 132285 F SKYJACK 161891 F	16x5	5 hole
XA4A020	SKYJACK 125786 R SKYJACK 132284 R SKYJACK 161890 R	16x5	5 hole

To ensure correct fitment always look up your unit's serial number in the OEM Parts Manual for the correct tire part number.
Tires in this product line will remain Carlisle branded until further notice

Wheels



CREAM AG
WHEEL 62



WHITE
AG WHEEL 62



HIGHWAY
SUPREME TRAILER
WHEEL WHITE 63



HIGHWAY
SUPREME TRAILER
WHEEL SILVER 63



HIGHWAY EIGHT
SPOKE TRAILER
WHEEL WHITE 64



HIGHWAY
STANDARD TRAILER
WHEEL WHITE 64





023 WHITE AG WHEEL



038 CREAM AG REVERSIBLE WHEEL



038 CREAM AG WHEEL

PULL BEHIND IMPLEMENTS, UTILITY TRAILERS, AND HEADER TRANSPORTS

CREAM AG WHEEL

PART NUMBER	RIM SIZE	COLOR	STYLE	CONTOUR	BOLT PATTERN	OFFSET (+/-)	BACK SPACE	CENTER BORE	LOAD RATING	WEIGHT
1519288038B	15x5	Cream	Standard	JJ	4/5.0	-0.250	2.75	3.64	2150	21
1529713038B	15x5	Cream	Reversible	JJ	6/6.0	1.125	4.14	4.64	2150	21
1519293038B	15x6	Cream	Standard	JJ	6/6.0	0.875	4.38	4.64	2800	21
1529771038B	15x6	Cream	Reversible	JJ	6/6.0	1.125	4.63	4.64	2800	24
1519294038B	15x8	Cream	Standard	JJ	6/6.0	1.125	5.63	4.64	3080	28
1519299038B	15x8	Cream	Standard	JJ	8/8.0	-1.500	3.00	6.00	3960	27
1519295038B	15x10	Cream	Standard	JJ	6/6.0	1.125	6.63	4.64	3500	32
1519300038B	15x10	Cream	Standard	JJ	8/8.0	-1.500	4.00	6.00	3500	33
1526074038B	15x10	Cream	Standard	LB	8/8.0	-1.500	4.00	6.00	4860	38
1619296038B	16x6	Cream	Standard	JJ	6/6.0	1.000	4.50	4.64	3800	32
1619297038B	16x8	Cream	Standard	JJ	6/6.0	1.125	5.63	4.64	3800	33
1619301038B	16x8	Cream	Standard	JJ	8/8.0	-1.500	3.00	6.00	4500	33
1619298038B	16x10	Cream	Standard	JJ	6/6.0	1.125	6.63	4.64	3080	37
1619302038B	16x10	Cream	Standard	JJ	8/8.0	-1.375	4.13	6.00	4080	36

* Indicates Standard/Reverse for Offset and Back Space

WHITE AG WHEEL

PART NUMBER	RIM SIZE	COLOR	STYLE	CONTOUR	BOLT PATTERN	OFFSET (+/-)	BACK SPACE	CENTER BORE	LOAD RATING	WEIGHT
1429722023B	14x6	White	Standard	JJ	6/6.0	0.875	4.38	4.64	1900	21
1519295023B	15x10	White	Standard	JJ	6/6.0	1.125	6.63	4.64	3500	33
1519300023B	15x10	White	Standard	JJ	8/8.0	-1.500	4.00	6.00	3500	32
1619302023B	16x10	White	Standard	JJ	8/8.0	-1.375	4.13	6.00	4500	36



HIGHWAY SUPREME, WHITE WITH STRIPES

HIGHWAY SUPREME SILVER

BOAT TRAILERS, CARGO TRAILERS, HORSE AND STOCK TRAILERS, RV-TOWABLE UTILITY AND SPECIALTY TRAILERS**HIGHWAY SUPREME TRAILER WHEEL - WHITE WITH RED AND BLUE STRIPES (BOXED)**

PART NUMBER	RIM SIZE	BOLT PATTERN	OFFSET (+/-)	REAR SPACING	SHIPPING WEIGHT	CENTER BORE	LOAD RATING
1222432564B	12x4.00	5/4.5	0	2.38	10	2.80	1520
1222433564B	12x4.00	4/4.0	0	2.47	10	2.80	1520
1322434564B	13x4.50	5/4.5	0	2.90	15	3.30	1660
1422676564B	14x6.00	5/4.5	0	3.55	16	3.30	2200
1522665564B	15x5.00	5/4.5	0	3.00	17	3.20	2200
1522666564B	15x6.00	6/5.5	0	3.55	19	4.28	3080
1522667564B	15x6.00	5/4.5	0	3.55	20	3.30	2860
1622670564B	16x6.00	8/6.5	0	3.55	30	4.90	4480
1622671564B	16x6.00	6/5.5	0	3.55	27	4.28	3750

HIGHWAY SUPREME TRAILER WHEELS - SILVER (BOXED)

PART NUMBER	RIM SIZE	BOLT PATTERN	OFFSET (+/-)	REAR SPACING	SHIPPING WEIGHT	CENTER BORE	LOAD RATING
1222432284B	12x4.00	5/4.5	0	2.38	11	2.80	1520
1322434284B	13x4.50	5/4.5	0	2.75	15	3.30	1660
1422676284B	14x6.00	5/4.5	0	3.55	16	3.30	2200
1522665284B	15x5.00	5/4.5	0	3.00	17	3.20	2200
1522667284B	15x6.00	5/4.5	0	3.55	20	3.30	2860
1522666284B	15x6.00	6/5.5	0	3.55	19	4.28	3080
1622671284B	16x6.00	6/5.5	0	3.55	27	4.28	3750
1622670284B	16x6.00	8/6.5	0	3.55	30	4.90	4480



HIGHWAY EIGHT SPOKE, WHITE WITH STRIPES



HIGHWAY STANDARD, WHITE

BOAT TRAILERS, CARGO TRAILERS, HORSE AND STOCK TRAILERS, RV-TOWABLE UTILITY AND SPECIALTY TRAILERS

HIGHWAY EIGHT SPOKE TRAILER WHEELS - WHITE WITH RED AND BLUE STRIPES (BOXED)

PART NUMBER	RIM SIZE	BOLT PATTERN	OFFSET (+/-)	REAR SPACING	SHIPPING WEIGHT	CENTER BORE	LOAD RATING
1222418564B	12x4.00	4/4.0	0	2.38	10	2.80	1520
1222419564B	12x4.00	5/4.5	0	2.38	10	2.80	1520
1322420564B	13x4.50	5/4.5	-3	2.58	15	3.30	1660
1422675564B	14x6.00	5/4.5	0	3.55	16	3.30	2200
1522661564B	15x5.00	5/4.5	0	3.00	17	3.20	2200
1522659564B	15x6.00	5/4.5	0	3.55	20	3.30	2860
1522664564B	15x6.00	5/4.75	0	3.55	20	3.30	2860
1522663564B	15x6.00	5/5.0	0	3.55	20	3.30	2860
1522662564B	15x6.00	5/5.5	0	3.55	19	4.28	2860
1522660564B	15x6.00	6/5.5	0	3.55	19	4.28	3080
1622669564B	16x6.00	6/5.5	0	3.55	27	4.28	3750
1622668564B	16x6.00	8/6.5	0	3.55	30	4.90	4480

HIGHWAY STANDARD TRAILER WHEELS - WHITE (BOXED)

PART NUMBER	RIM SIZE	BOLT PATTERN	OFFSET (+/-)	REAR SPACING	SHIPPING WEIGHT	CENTER BORE	LOAD RATING
0821466266B	8x3.75	4/4.0	-2	2.18	5	2.80	910
0821467266B	8x3.75	5/4.5	-2	2.19	4	2.80	1075
0815293266B	8x5.38	4/4.0	-22	2.25	6	2.80	910
0815295266B	8x5.38	5/4.5	-23	2.25	5	2.80	1075
0821654266B	8x7.00	4/4.0	-1	3.90	6	2.52	915
0821637266B	8x7.00	5/4.5	-2	3.50	6	2.80	1075
1021632266B	10x6.00	4/4.0	0	3.39	9	2.80	1320
1021583266B	10x6.00	5/4.5	-3	3.40	9	2.80	1535



TUBES / FLAPS



LAWN AND GARDEN, INDUSTRIAL TRAILER

SIZE	PRODUCT CODE	VALVE	VALVE ON/OFF - CENTER	UNIT WEIGHT	UNITS / CASE
2.80/2.50-4	320050	TR87DG60	ON	0.3	10
2.80/2.50-4	320010	JS87P-SW	5 mm	0.3	10
9x3.50-4	320030	TR87DG60	ON	0.3	10
9x3.50-4	320031	JS87P-SW	5 mm	0.3	10
4.10/3.50-4	320100	TR87DG60	5 mm	0.4	10
4.10/3.50-4	320040	TR13	5 mm	0.4	10
4.10/3.50-4	320020	JS87P-SW	5 mm	0.4	10
3.40/3.00-5	320150	TR87DG60	10 mm	0.4	10
4.10/3.50-5	320200	TR87DG60	10 mm	0.4	10
4.10/3.50-5	320070	TR13	10 mm	0.4	10
4.10/3.50-5	320060	JS87P-SW	10 mm	0.4	10
11x4.00-5	320080	TR87	20 mm	0.4	10
11x6.00-5	323520	TR87DG60	10 mm	0.6	10
4.10/3.50-6	320250	TR87DG60	10 mm	0.5	10
4.10/3.50-6	320160	TR13	10 mm	0.5	10
13x5.00-6	320260	TR87DG60	10 mm	0.6	10
13x5.00-6	323790	TR13	10 mm	0.6	10
13x6.50-6	320170	TR13	10 mm	0.6	10
5.30/4.50-6	320270	TR87DG60	10 mm	0.6	10
15x6.00-6	320290	TR87DG60	20 mm	0.8	10
15x6.00-6	323800	TR13	20 mm	0.8	10
3.50/4.00-8	320120	TR13	ON	0.5	10
3.50/4.00-8	320360	TR87DG60	ON	0.5	10
4.80/4.00-8	320400	TR13	10 mm	0.5	10
4.80/4.00-8	320130	TR87	10 mm	0.5	10
16x6.50/7.50-8	320420	TR13	25 mm	0.9	10
18x6.50/7.50/8.50/9.50-8 20x8.00/10.00-10	320410	TR13	25 mm	1.5	10
20x8.00/10.00-10 18x8.50-10	320770	TR13	20 mm	1.6	10
6.00-12	323843	TR13	20 mm	1.3	10
4.80/5.30-12	320901	TR13	20 mm	1.1	10
23x8.50/9.50/10.50-12	321370	TR13	25 mm	2.0	10
24/26x12.00-12	321050	TR13	40 mm	2.7	10
AT20x8/10R10	320771	TR6	20 mm	1.6	10

RADIAL ATV

SIZE	PRODUCT CODE	VALVE	VALVE ON/OFF - CENTER	UNIT WEIGHT	UNITS / CASE
16x8.00R7	320035	TR6	20 mm	1.2	10
21/22x11/12R8	320440	TR6	25 mm	1.5	10
20x7.00R8	320141	TR6	25 mm	1.5	10
20x7.00-8	320140	TR6	25 mm	1.5	10
25x12/13R9	321520	TR6	45 mm	2.0	10
AT22/23x8R11/12	321371	TR6	25 mm	2.0	10
AT24/26x12R12	321051	TR6	40 mm	2.7	10
AT26x8/9R14	324500	TR6	30 mm	1.9	10

RADIAL PASSENGER

SIZE	PRODUCT CODE	VALVE	VALVE ON/OFF - CENTER	UNIT WEIGHT	UNITS / CASE
4.00/4.50/4.80/5.30-12 DR12	323844	TR13	10 mm	0.9	10

RADIAL LIGHT TRUCK

SIZE	PRODUCT CODE	VALVE	VALVE ON/OFF - CENTER	UNIT WEIGHT	UNITS / CASE
9.50/10R16.5	322320	TR15CW	25 mm	3.4	6
12R16.5LT	323990	TR15CW	50 mm	4.2	6

RADIAL HEAVY TRUCK

SIZE	PRODUCT CODE	VALVE	VALVE ON/OFF - CENTER	UNIT WEIGHT	UNITS / CASE
8.25R20	322080	TR442	ON	3.9	4
9.00R20	322090	TR443	ON	4.7	4
10.00R20 12/80R20	322100	TR444	ON	5.6	4
11.00R20 13/80R20	322110	TR444	ON	6.0	4
12.00R20 14/80R20	322460	TR444	ON	7.2	4
10.00R22	322270	TR444	ON	6.6	4
11.00R22	322280	TR444	ON	6.6	4

HEAVY DUTY BIAS

SIZE	PRODUCT CODE	VALVE	VALVE ON/OFF - CENTER	UNIT WEIGHT	UNITS / CASE
10.00-20	322330	TR444	ON	5.6	6

RV AND WIDE BASE TRUCK BIAS & SKID STEER

SIZE	PRODUCT CODE	VALVE	VALVE ON/OFF - CENTER	UNIT WEIGHT	UNITS / CASE
10/11R15LT	322310	TR13	45 mm	3.7	6

For tube stem and valve stem information and specifications, refer to most recent Tire and Rim Association publications.

**LOW PLATFORM RADIAL**

SIZE	PRODUCT CODE	VALVE	VALVE ON/OFF -CENTER	UNIT WEIGHT	UNITS / CASE
7.00/7.50R15TR	322450	TR444	ON	1.9	6
8.25R15TR	322240	TR444	ON	3.1	6
9.00/10.00/11.00R15TR	322250	TR444	ON	3.5	6

MOBILE HOME BIAS

SIZE	PRODUCT CODE	VALVE	VALVE ON/OFF -CENTER	UNIT WEIGHT	UNITS / CASE
7/8/9-14.5 MH	322290	TR300	25 mm	2.2	6

OTR/CONSTRUCTION/SKID STEER

SIZE	PRODUCT CODE	VALVE	VALVE ON/OFF -CENTER	UNIT WEIGHT	UNITS / CASE
8.3/9.5/12.5-18/20	322000	TR15CW	35 mm	3.5	6

RADIAL OTR/CONSTRUCTION/SKID STEER

SIZE	PRODUCT CODE	VALVE	VALVE ON/OFF -CENTER	UNIT WEIGHT	UNITS / CASE
15R19.5	323131	TR15CW	60 mm	6.9	3
13.00/14.00R24TG	322341	TR220A	55 mm	9.7	1
17.5R25	323661	TRJ1175C	ON	14.4	1
20.5R25	323671	TRJ1175C	ON	19.4	1
23.5R25	323681	TRJ1175C	ON	23.3	1

HEAVY DUTY INDUSTRIAL LIFT/FORK TRUCK MINING

SIZE	PRODUCT CODE	VALVE	VALVE ON/OFF -CENTER	UNIT WEIGHT	UNITS / CASE
5.70/5.00-8	323820	JS2	25 mm	0.9	36
4.80/4.00-8/9NHS 5.70/5.00-8NHS	322410	JS2	10 mm	0.7	12
6.90/6.00-9	323830	JS2	12 mm	1.3	28
6.50-10	323840	JS2	12 mm	1.4	22
7.00-12	322420	TR440	ON	1.9	6
7.50/8.25-15	323850	TR440	ON	2.2	14
28/29x8/9-15	323860	TR440	ON	2.2	14
28x12-15	323900	TR440	ON	3.4	10
29x8-15	323920	TR440	ON	2.2	14
250-15	323880	TR440	ON	2.3	11
300-15	323890	TR440	ON	3.5	10
32x12-15	323910	TR440	ON	3.4	10
8.25-15	323870	TR442	ON	3.1	12

FARM FRONT BIAS

SIZE	PRODUCT CODE	VALVE	VALVE ON/OFF -CENTER	UNIT WEIGHT	UNITS / CASE
4.00/5.50/5.90/ 6.00-15SL	322350	TR15	20 mm	2	6
5.50/5.90/6.00/ 6.40-15/16SL	322120	TR15	20 mm	2	6
6.50/7.00/7.50/7.60/ 8.00-15/1	322360	TR15	25 mm	3	6
10.00-15/16SL	322130	TR15CW	25 mm	5	6
11.00-16SL	322370	TR15CW	50 mm	4	6
6.50/7.00/7.50-18SL	322140	TR15	25 mm	3	6
4.00-18/19SL	322380	TR15	15 mm	2	6

REAR FARM RADIAL

SIZE	PRODUCT CODE	VALVE	VALVE ON/OFF -CENTER	UNIT WEIGHT	UNITS / CASE
11.2/12.4R24	323960	TR218A	66 mm	6.1	4
7.50R24SL 7.5/8.3/9.5R24	323601	TR218A	40 mm	4.2	8
13.6/14.9R24	323950	TR218A	55 mm	9.3	3
14.9/16.9/17.5LR24	323760	TR218A	40 mm	11.7	3
18.4/19.5L/21LR24	323770	TR218A	75 mm	16.4	2
11.2/12.4R28 11.25R28SL	323591	TR218A	65 mm	7.7	3
13.6/14.9R28	323750	TR218A	83 mm	11.1	3
13.6/14.9R26/28	324110	TR218A	58 mm	10.1	3
16.9/18.4R26/28	323730	TR218A	89 mm	15.8	2
14.9R30	323741	TR218A	84 mm	12.8	3
16.9/18.4R30	323780	TR218A	100 mm	15.7	2
11.2R34 11.2/12.4R36	323651	TR218A	70 mm	9.4	3
24.5R32	323742	TR218A	125 mm	26.1	2
13.6/14.9R34	324120	TR218A	58 mm	12.4	3
16.9/18.4R34	323700	TR218A	89 mm	17.0	2
13.6/14.9R36	323621	TR218A	83 mm	12.6	3
11.2/12.4R38	323631	TR218A	70 mm	11.7	3
14.9R36 13.6/14.9/15.5R38	323720	TR218A	83 mm	12.6	3
16.9/18.4R38	323690	TR218A	89 mm	18.9	2
20.8R38	323710	TR218A	90 mm	23.3	2
18.4/20.8R42	323740	TR218A	90 mm	21.2	2
16.9/18.4R46 420/80R46 480/80R46	323693	TR218A	90 mm	20.2	2

HD SEVERE SERVICE - REAR FARM RADIAL

SIZE	PRODUCT CODE	VALVE	VALVE ON/OFF -CENTER	UNIT WEIGHT	UNITS / CASE
12-16.5LT	322490	TR15CW	50 mm	4.2	6
16.9/18.4R38 480/80R38	323691	TR218A	89 mm	22.0	1
18.4/20.8R42 480/80R42 520/85R42	323692	TR218A	90 mm	26.1	1
16.9/18.4R46 420/80R46 480/80R46	323694	TR218A	90 mm	26.0	1

For tube stem and valve stem information and specifications, refer to most recent Tire and Rim Association publications.

FARM IMPLEMENT BIAS

SIZE	PRODUCT CODE	VALVE	VALVE ON/OFF -CENTER	UNIT WEIGHT	UNITS / CASE
6.90/6.00-9	321500	TR13	25 mm	1.2	10
8.5/9.5/11L-14 8.5/9.5L-15	322390	TR13	25 mm	2.8	6
11L-15/16SL	322150	TR218A	25 mm	3.4	6
11L-15/16SL	322400	TR15CW	25 mm	3.4	6
12.5L-15/16SL	322470	TR218A	45 mm	4.5	6
12.5L-15/16SL	323810	TR15CW	45 mm	4.5	6
13.6/14L-16.1	320032	TR218A	40 mm	6.8	7
16.5/18.4L-16.1	320033	TR218A	65 mm	10.3	4
21.5L-16.1	320034	TR218A	80 mm	15.1	2

RADIAL INDUSTRIAL FLAPS

SIZE	PRODUCT CODE	VALVE ON/OFF -CENTER	UNIT WEIGHT	UNITS / CASE
8R3.0	5508	13 mm	0.4	20
8R7.0	12311	ON	1.7	15
9R6.7	11009	15 mm	0.8	20
10R6.7	12310	13 mm	1.1	15
12R6.0	12812	ON	1.4	15
15R10.00	19015	ON	3.9	10
16R6.50/7.00/7.50/8.25	17016	25 mm	2.9	14
15R6.50/7.00/7.50/8.25	17015	ON	2.4	14
20R7.50/8.25	17020	ON	3.2	12
20R8.25	18020	ON	3.8	8
20R9.00/10.00	20520	ON	4.6	7
22R10.00/11.00	20522	ON	5.3	6
20R11.00/12.00	21020	ON	5.5	6
20R13.00/14.00	23020	ON	6.5	4
24R11.1 - Valve Hole 1.2"	19016	30 mm	6.9	4
24R11.1 - Center Valve Hole	21024	ON	6.9	5

For tube stem and valve stem information and specifications, refer to most recent Tire and Rim Association publications.

TUBELESS VALVE STEMS

SIZE	PRODUCT CODE	VALVE HOLE DIAMETER	INSTALLED VALVE LENGTH	UNIT WEIGHT	UNITS / CASE
TR412	10200000007	0.453	0.88	4.4	6
TR413	10200000005	0.453	1.25	4.4	6
TR600HP*	10200000008	0.453	1.27	4.4	6

HIGH SPEED TRAILER

SIZE	PRODUCT CODE	VALVE	VALVE ON/OFF -CENTER	UNIT WEIGHT	UNITS / CASE
5.70/5.00-8	320450	TR13	25 mm	0.9	10
570/5.00-8	322810	TR13	25 mm	0.9	40
ER12/13	322160	TR13	20 mm	1.1	10
FR13/14	322010	TR13	20 mm	1.3	10
GR13/14/15	322020	TR13	25 mm	1.5	10
KR14/15	322030	TR13	30 mm	1.9	10
MR14/15	322040	TR13	25 mm	2.1	10
7/8/9-14.5 MH	322290	TR300	25 mm	2.2	6
FR15	322170	TR13	20 mm	1.4	10
7.00/7.50R15LT	322070	TR150	25 mm	1.8	10
7.00/7.50R15LT	322230	TR13CW	25 mm	1.8	10
8.25R15TR	322240	TR444	ON	3.1	6
9.00/10.00/11.00R15TR	322250	TR444	ON	3.5	6
7.00/7.50R15TR	322450	TR440	ON	1.9	6
7.00/7.50R15LT	322310	TR13	45 mm	3.7	6
GR/KR16	322050	TR13	25 mm	1.6	10
7.00/7.50R16LT	322060	TR150	25 mm	2.9	10
GR/KR16	322190	TR15CW	25 mm	1.6	10
7.00/7.50R16LT	322200	TR13	25 mm	2.8	10
7.00/7.50R16LT	322210	TR440	ON	2.9	10
7.00/7.50R16LT	322220	TR15CW	25 mm	2.8	10
7.00/7.50R16LT	322430	TR13CW	25 mm	2.8	10
14R17.5	323111	TR300	58 mm	5.6	3
7.00/7.50R17/18	322440	TR440	ON	2.6	10
8.25R20	322080	TR442	ON	3.9	4
9.00R20	322090	TR443	ON	4.7	4
10.00R20 12/80R20	322100	TR444	ON	5.6	4
11.00R20 13/80R20	322110	TR444	ON	6.0	4
10.00-20	322330	TR444	ON	5.6	6
12.00R20 14/80R20	322460	TR444	ON	7.2	4
10.00R22	322270	TR444	ON	6.6	4
11.00R22	322280	TR444	ON	6.6	4

For tube stem and valve stem information and specifications, refer to most recent Tire and Rim Association publications.



INNER TUBE FITMENT CHART

SIZE	PRODUCT CODE	VALVE	VALVE ON/OFF - CENTER	ALSO FITS
4.10/3.50-4	320100	TR87DG60	5 mm	11x4.00-4
4.10/3.50-5	320200	TR87DG60	10 mm	11x4.00-5
13x5.00-6	320260	TR87DG60	10 mm	12x5.00-6, 14x4.50-6
5.30/4.50-6	320270	TR87DG60	10 mm	13x6.50-6, 14.5/7.00-6
18x6.50/7.50-8	320410	TR13	25 mm	18x8.50/9.50-8, 20x8.00/9.00/10.00-8
23x8.50/9.50-12	321370	TR13	25 mm	22x7.50/9.00-12, 23/24x10.50-12
26x12.00-12	321050	TR13	40 mm	24x12.00-12, 26x10.50-12

RADIAL ATV TUBE FITMENT CHART

SIZE	PRODUCT CODE	VALVE	VALVE ON/OFF - CENTER	ALSO FITS
21/22x11/12R8	320440	TR6	25 mm	18x8-8, AT20x7-8, AT22x9R8, AT21x8R9, 18x8.5/9.5-8, AT20x10/11-8, AT22x10R8, AT20x7R9, 18x10/11-8, AT21x10/11R8, AT22x11R8, AT22x7R9, 19x8.5/9.5-8, AT21x12R8, AT22x12R8, AT23x8R9, 19x10/11-8, AT22x11R9
25x12/13R9	321520	TR6	45 mm	AT24x11R9, AT25x11R9, AT24x11R10, AT26x12R10, AT24x12/13R9, AT25x12R9, AT25x11R10, 24x13.5-9, AT25x12R10, 25x13.5-9
AT20x8/10R10	320771	TR6	20 mm	AT18x10R10, AT21x7R10, AT22x8R10, AT23x9R10, AT18x11R10, AT22x7R10, AT22x10R10, AT23x10R10, 20x7.5-10, AT23x7R10, AT22x11R10, AT20x8R10, 22x12.5-10, AT20x10R10, AT20x11R10
AT22/23x8R11/12	321371	TR6	25 mm	AT23x8-11, AT23x8R12, AT23x10R12, AT24x8-11, AT24x8R12, AT24x10R12, AT24x9-11, AT25x8R12, AT25x10R12, 23.5x8-11, AT23x9R12
AT24/26x12R12	321051	TR6	40 mm	AT24x12R12, AT25x8R11/12, AT26x10R12, AT25x11R12, AT25x12/13R12, AT26x8R11/12, AT26x12R12, AT26x11R11/12, AT27x8R11/12, AT27x11/12R12
AT26x8/9R14	324500	TR6	30 mm	AT26x8R14, AT26x9R14

RADIAL LT TUBE FITMENT CHART

SIZE	PRODUCT CODE	VALVE	VALVE ON/OFF - CENTER	ALSO FITS
7.00/7.50R15LT	322230	TR13CW	25 mm	670R/710R750R15LT, P215/75R15, LT215/225/235R15LT, P235/75R15, LT245/70R15LT, P245/70R15, LT255/70R15LT, P255/70R15, 670R/710R-750R15LT, P235/245/70R15
7.00/7.50R15LT	322070	TR150	25 mm	LT215/235/75R15, P255/65R15, P255/60R15
7.00/7.50R16LT	322060	TR150	25 mm	LT215/235/85R16, LT225/245/265/75R16
7.00/7.50R16LT	322200	TR13	25 mm	LR78-16LT, LT235/65R16, P265/75R16, P235/75R16, LT225/70R16, LT235/70R16, P215/225/75R16LT, P235/65R17, LT235/75R16, LT245/70R16, P225/70R16, P245/70R16, LT225/85R16, LT245/75R16, P225/235/85R16, P255/70R16, LT235/85R16, LT255/70R17, P235/65R16, P255/60R17, LT255/60R17, LT235/65R17, P235/70R17, P265/70R16, LT215/235/85R16, P245/75R16, P265/60R17
7.00/7.50R16LT	322220	TR15CW	25 mm	GR/HR/LR78-16LT, MR16HD, P215/225/75R16LT, LT215/235/85R16, LR78-16LT, LT225/85R16, LT225/70R16, LT235/70R16, LT235/75R16, LT245/70R16, LT255/70R16, 8.25R16LT
7.00/7.50R16LT	322210	TR440	ON	GR/HR/LR78-16LT, MR16HD, P215/225/75R16LT, LT215/235/85R16, LR78-16LT, LT225/85R16, LT225/70R16, LT235/70R16, LT235/75R16, LT245/70R16, LT255/70R16, 8.25R16LT
7.00/7.50R16LT	322430	TR13CW	25 mm	LT215/235/85R16, MR16HD
7.00/7.50R17/18	322440	TR440	ON	P265/60R17, P255/60R17, P235/65R17, LT255/70R17, LT235/65R17, LT255/60R17
9.50/10R16.5	322320	TR15CW	25 mm	31x10.50R16.5LT, LT265/60D16.5
12R16.5LT	323990	TR15CW	50 mm	33x12.50R16.5LT, 305/70D16.5NHS, 305/90D16.5NHS

For tube stem and valve stem information and specifications, refer to most recent Tire & Rim Association publications.

REAR FARM RADIAL

SIZE	PRODUCT CODE	VALVE	VALVE ON/OFF - CENTER	ALSO FITS
11.2/12.4R24	323960	TR218A	66 mm	320/85R24
13.6/14.9-24	323950	TR218A	55 mm	340/85R24, 380/85R24
14.9/16.9/17.5LR24	323760	TR218A	40 mm	460/70R24
18.4/19.5L/21LR24	323770	TR218A	75 mm	500/70R24, 540/70R24
13.6/14.9R28	323750	TR218A	83 mm	340/85R28, 380/85R28, 380/85R30
13.6/14.9R26/28	324110	TR218A	58 mm	340/85R28, 380/85R28
16.9/18.4R26/28	323730	TR218A	89 mm	480/80R26
14.9R30	323741	TR218A	84 mm	380/85R30
16.9/18.4R30	323780	TR218A	100 mm	420/90R30, 480/80R30
24.5R32	323742	TR218A	125 mm	650/75R32
13.6/14.9R34	324120	TR218A	58 mm	380/85R34
16.9/18.4R34	323700	TR218A	89 mm	420/85R34, 480/85R34
11.2/12.4R38	323631	TR218A	70 mm	290/90R38
13.6/14.9R36	323621	TR218A	83 mm	340/85R36, 380/85R36
14.9R36 13.6/14.9/15.5R38	323720	TR218A	83 mm	380/80R38
16.9/18.4R38	323690/323691	TR218A	89 mm	480/80R38
20.8R38	323710	TR218A	90 mm	520/85R38
18.4/20.8R42	323740/323692	TR218A	90 mm	480/80R42, 520/85R42
16.9/18.4R46 420/80R46 480/80R46	323693/323694	TR218A	90 mm	420/80R46, 480/80R46





For tube stem and valve stem information and specifications, refer to most recent Tire & Rim Association publications.



PASSENGER TUBE FITMENT CHART

SIZE	PRODUCT CODE	VALVE	VALVE ON/OFF - CENTER	ALSO FITS
4.00/4.50/4.80/5.30-12 DR12	323844	TR13	10 mm	DR12, 4.00-12, 4.50-12, 4.80-12, 5.30-12
ER12/13	322160	TR13	20 mm	A78-13, 145/80R12/13, 185/60R13, 5.00-12/13, 135R12, 155/80R13, 195/60R13, 5.20-12/13, 145R12/13, 165/70R12/13, AR78-12, 5.50-12, 155R12/13, 155/70R12, BR78-12, 5.60-12/13, 165R13, 6R12SL
FR13/14	322010	TR13	20 mm	A78-13/14, 165R14, 185/70R13/14, 6.00-13/14, B78-13/14, 165/80R13/14, 205/60R13/14, 6.15-13, A70-13, 175/80R13, 185/60R14, 6.40-13, B70-13/14, 155/80R14, 195/60R14, 6.50-13, A60-13/14, 165/75R13/14, AR78-13/14, 6R14SL, B60-13/14, 175/75R13/14, BR78-13/14, 7R14SL, 175R13, 185/75R13, AR70-13, 155R14, 175/70R13/14, BR70-13/14
FR15	322170	TR13	20 mm	A78-15, 175R15, 195/60R15, 5.00-15, B78-15, 155/80R15, 205/60R15, 5.50-15, B70-15, 165/80R15, AR78-15, 6.00-15, 155R15, 175/75R15, BR78-15, 165R15, 185/70R15, BR70-15
GR13/14/15	322020	TR13	25 mm	C78-13/14/15, G60-14, 215/60R14/15, 7.00R13/14, D78- 13/14/15, 185R13/14/15, 225/60R14/15, 6.50R14, E78-14/15, 195R13/14/15, 245/60R14, 7.35R14, F78-14/15, 175R14, CR78-13/14/15, 6.85R15, C70-13/14/15, 185/80R13/14, DR78-13/14/15, LT195/75R14, D70-13/14/15, 175/80R14, ER78-14/15, 700R14LT, E70-14/15, 195/75R13/14/15, FR78- 15, 7.9R14LT, F70-14/15, 185/75R14/15, CR70-13/14/15, 26 x 850R14LT, C60-14/15, 205/75R14, DR70-13/14/15, 27 x 850R14LT, D60-14/15, 195/70R13/14/15, ER70-14/15, 27 x 750R15LT, E60-14/15, 205/70R13/14/15, FR70-14/15, F60- 14/15, 235/60R13/14, 6.70R13/14
KR14/15	322030	TR13	30 mm	G78-14/15, 225R15, 235/60R15, 7.75R14/15, H78- 14/15, 195/80R15, 245/60R15, 8.00R14/15, G70-14/15, 215/75R14/15, FR78-14, 8.25R14/15, H70-14/15, 225/75R14, GR78-14/15, 8.55R15, H60-14/15, 205/75R15, HR78- 14/15, G60-15, 215/70R14/15, GR70-14/15, 205R14/15, 225/70R14/15, HR70-14/15, 215R14/15, 255/60R14, 7.50R14/15,
MR14/15	322040	TR13	25 mm	J78-14/15, M60-14/15, 265/60R14/15, LR70-15, K78-15, N60-15, 275/60R14/15, 8.50R14, L78-15, 225R14, 255/60R15, 8.85R14/15, N78-15, 235R15, JR78-14/15, 9.00R14/15, J70- 14/15, 235/75R14/15, KR78-15, 9.50R14, K70-15, 225/75R15, LR78-15, 9.15R15, L70-15, 235/70R14/15, NR78-15, J60-14, 245/70R14/15, JR70-14/15, L60-14/15, 255/70R15, KR70-15
GR/KR16	322050	TR13	25 mm	F78-16, FR78-16, 5.50R16, 7R16SL, H78-16, HR78-16, 6.00R16, 8R16SL, L78-16, JR78-16, 6.50R16, LR78-16, 6.70R16, 7.00R16, 7.50R16
GR/KR16	322190	TR15CW	25 mm	F78-16, FR78-1, 6.8.00R16, H78-16, HR78-16, 8.25R16, L78-16, LR78-16

For tube stem and valve stem information and specifications, refer to most recent Tire & Rim Association publications.

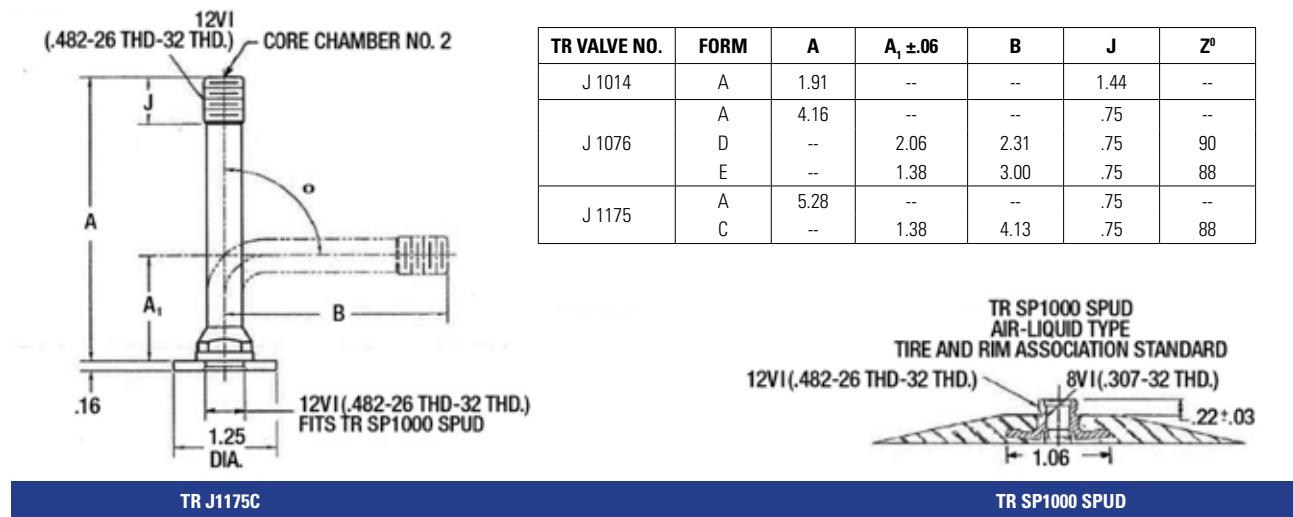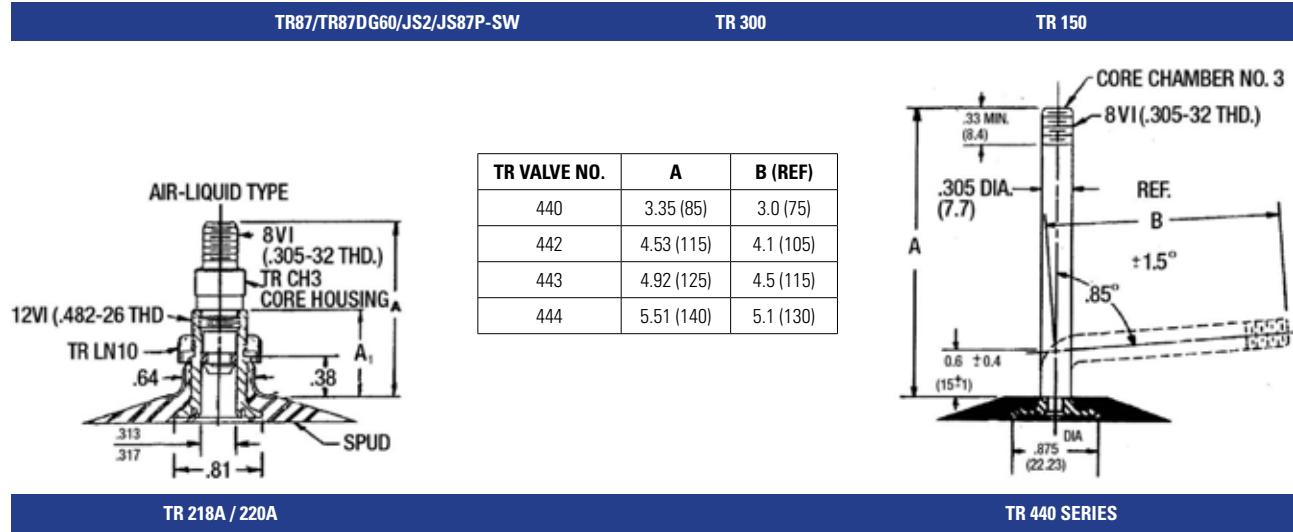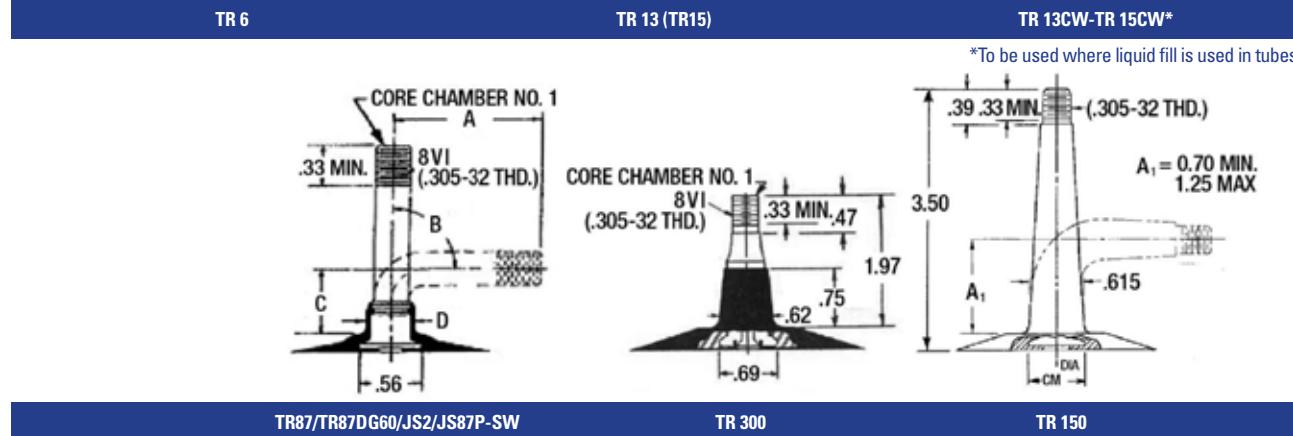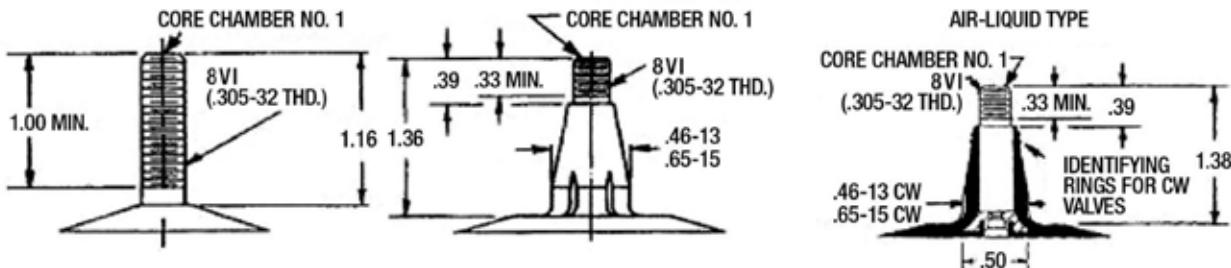

NOTES



PROPOSITION 64

California's Proposition 65, also known as the Safe Drinking Water and Toxic Enforcement Act of 1986, requires the Governor of California to publish a list of chemicals known by the state to cause cancer, birth defects or other reproductive harm. The complete list of Prop 65 chemicals is available here:

http://www.oehha.ca.gov/prop65/prop65_list/Newlist.html

This notice is intended to warn Carlstar's customers that some products distributed by the Titan International in California contain chemicals that are included on California's Prop 65 list. Such products include:

Tires	alpha-styrene, butadiene, cadmium, carbon black	cancer / reproductive harm
Wheels	cadmium, beryllium, hexavalent chromium	cancer / reproductive harm
Valve Stems	carbon black	cancer
Sealant	ethylene glycol	reproductive harm

which is [are] known to the State of California to cause both cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Titan International has chosen to provide this warning based on its knowledge about the presence of one or more Prop 65 chemicals in its products. Titan International has not attempted to evaluate the level of possible exposure. Products distributed by Titan International may contain listed chemicals at levels that are below the Proposition 65 level of concern, or could even be zero. Out of an abundance of caution, Titan International has elected to place the Proposition 65 warning notification on all its products that contain chemicals identified on California's Prop 65 list.

Corporate Office:**Titan International, Inc.**

1525 Kautz Road
Suite 600
West Chicago, IL 60185
Tel: **+1 630 377-0486**
Email: corp.marketing@titan-intl.com

© 2025 Titan International, Inc.
All rights reserved. Materials and specifications
are subject to change without notice.
Revision 06/24. Part #CSL - L - 2004

Customer Service:**USA**

Tel: **+1 800-827-1001**
Email: orders@titan-intl.com

Warranty Department:

Tel: **+1 800-260-7959**
Email: customer.care@titan-intl.com

Canada

Waterloo Tel: **1(800)265-6155**
Edmonton Tel: **1(877)842-6275**

WWW.CARLSTAR.COM

AUTHORIZED CARLSTAR DISTRIBUTOR

